


東芝照明器具配光データシート

名 称	LEDライン器具
形 名	BN061C9CWL9

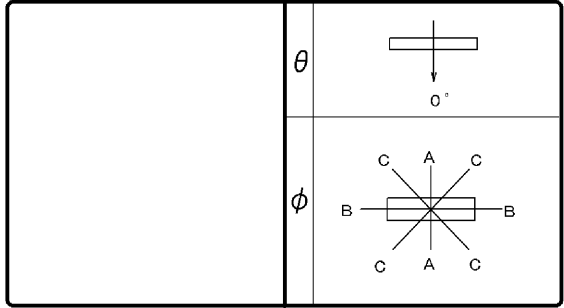

効 率	F ◡	14 %
	F ◩	86 %
	F ○	100 %
	器具 光束	900 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

前 面	カバー (乳白)
反射面	

最大取付間隔	
A-A	1.4 H
B-B	1.3 H

備考
フィリップスブランド (銘版型名) :
BN061C LED9/CW L900 100V JP

θ \ φ	A-A	B-B	C-C
0°	225	226	226
10°	223	223	223
20°	217	213	215
30°	206	196	202
40°	192	173	184
50°	175	142	162
60°	156	106	138
70°	137	66	113
80°	117	26	89
90°	96	2	68
100°	74	2	33
110°	53	2	28
120°	39	1	22
130°	28	1	15
140°	18	0	10
150°	11	0	4
160°	7	0	3
170°	2	0	2
180°	0	0	0

反射率 (%)	天井			80			70			50			30			20			0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
室指数	固有照明率 (×0.01)																				
0.60	56	52	42	39	33	32	54	50	40	38	32	31	37	36	30	29	29	28	23	21	
0.80	67	61	52	49	43	41	64	59	50	48	41	40	47	45	39	38	37	36	31	28	
1.00	74	67	60	55	49	47	71	64	57	53	48	46	53	50	45	44	42	41	36	33	
1.25	82	73	68	62	57	54	78	70	65	60	55	52	60	56	52	50	49	47	42	38	
1.50	87	77	73	66	63	59	82	74	70	64	61	57	65	60	57	54	53	51	46	42	
2.00	95	83	83	74	73	67	90	80	79	72	71	65	73	68	66	62	61	59	53	49	
2.50	100	86	89	79	80	72	95	83	85	76	77	70	78	72	71	67	66	63	58	54	
3.00	104	89	94	82	85	76	98	86	90	80	82	74	82	75	76	70	70	67	62	57	
4.00	109	93	100	87	93	82	103	90	96	84	89	80	87	79	82	76	75	72	67	63	
5.00	112	95	105	90	98	85	106	92	100	87	94	83	90	82	86	79	79	75	70	66	
10.00	119	99	114	96	110	94	112	96	109	94	105	91	98	89	95	87	87	82	78	74	

