


東芝照明器具配光データシート

名称	LED街路灯
形名	LEDG-10829N (K)

保守率	良	0.78
	中	0.76
	否	0.72


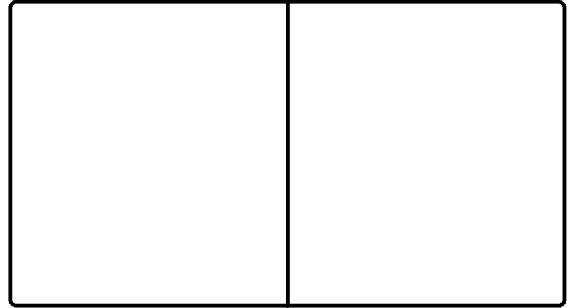


光源	名称	LEDランプ
	形名	—
	光束	9000 lm × 1

効率	F $\frac{1}{2}$	9.7 %
	F $\frac{3}{4}$	90.3 %
	F \circ	100 %
	器具光束	9000 lm

備考

前面	グローブ (透明)
反射面	

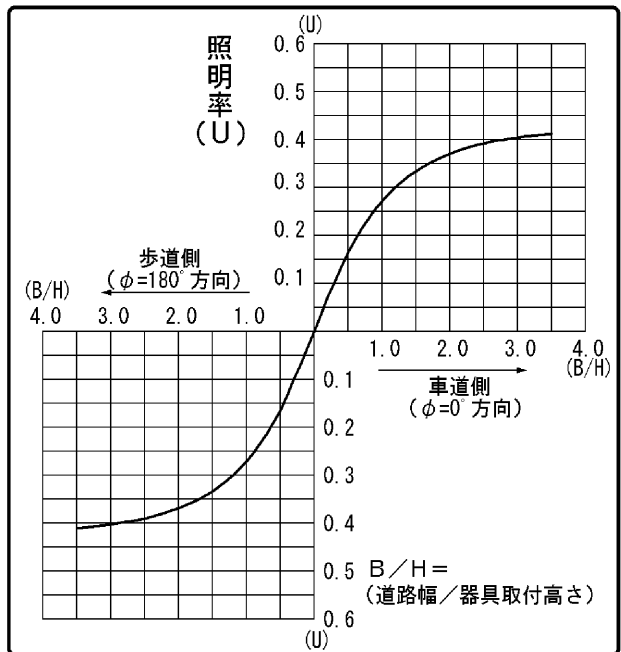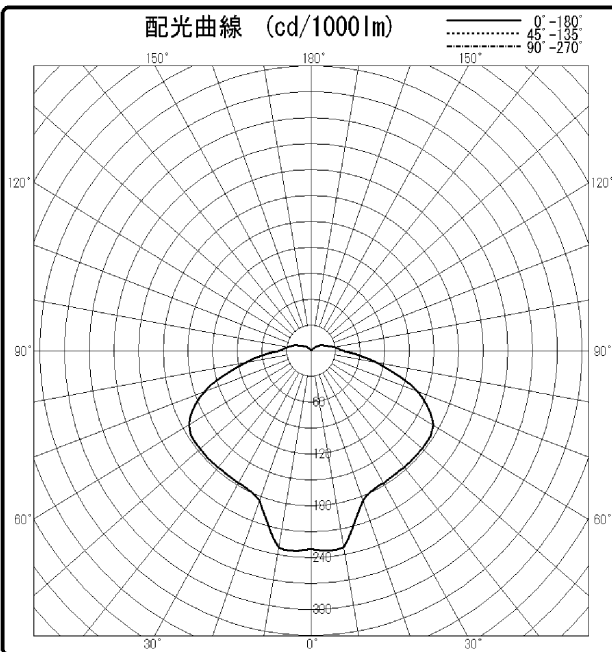

		光度 (cd/1000lm)				
θ	ϕ	0°	45°	90°	135°	180°
0°	0°	230				
10°	0°	231				
20°	0°	185				
30°	0°	177				
40°	0°	177				
50°	0°	177				
60°	0°	172				
70°	0°	138				
80°	0°	81				
90°	0°	39				
100°	0°	29				
110°	0°	21				
120°	0°	14				
130°	0°	9				
140°	0°	3				
150°	0°	0				
160°	0°	0				
170°	0°	0				
180°	0°	0				

