

東芝照明器具配光データシート


| | |
|----|-----------------|
| 名称 | LED街路灯 |
| 形名 | LEDG-10829N (S) |

| | | |
|-----|---|------|
| 保守率 | 良 | 0.78 |
| | 中 | 0.76 |
| | 否 | 0.72 |



| | | |
|----|----|-------------|
| 光源 | 名称 | LEDランプ |
| | 形名 | — |
| | 光束 | 9000 lm × 1 |

| | | |
|----|-----------------|---------|
| 効率 | F $\frac{1}{2}$ | 9.7 % |
| | F $\frac{3}{4}$ | 90.3 % |
| | F \circ | 100 % |
| | 器具光束 | 9000 lm |

| | |
|-----|-----------|
| 前面 | グローブ (透明) |
| 反射面 | |

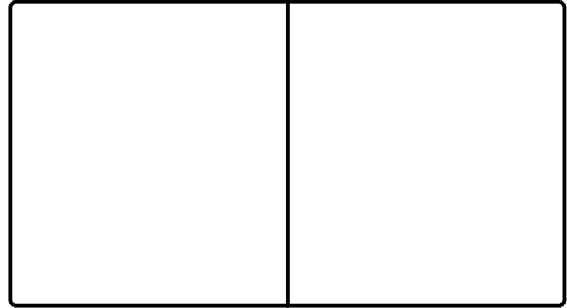

備考

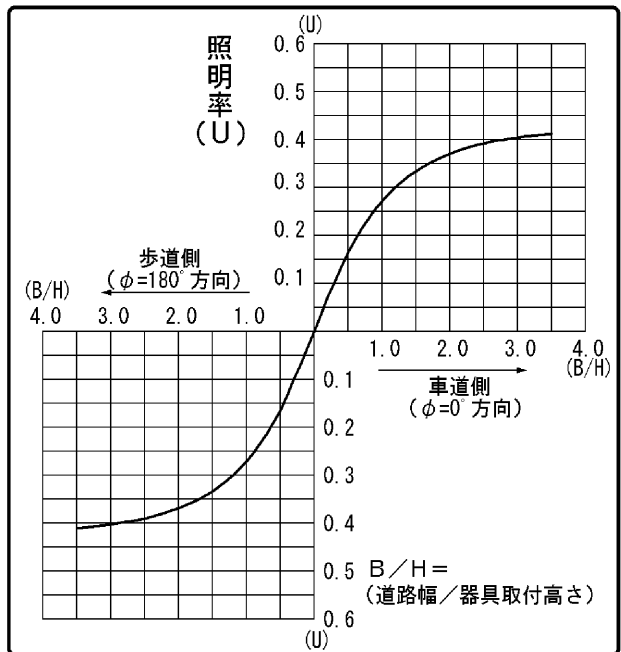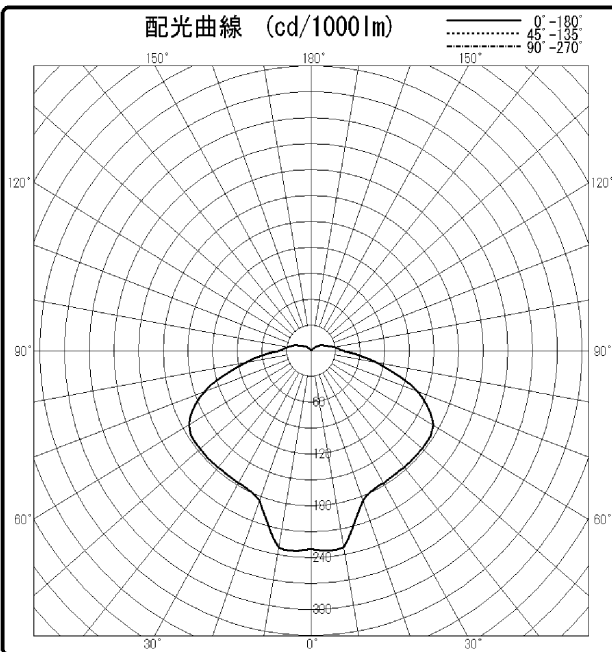

| | | 光度 (cd/1000lm) | | | | |
|----------|--------|----------------|-----|-----|------|------|
| θ | ϕ | 0° | 45° | 90° | 135° | 180° |
| 0° | 0° | 230 | | | | |
| 10° | 0° | 231 | | | | |
| 20° | 0° | 185 | | | | |
| 30° | 0° | 177 | | | | |
| 40° | 0° | 177 | | | | |
| 50° | 0° | 177 | | | | |
| 60° | 0° | 172 | | | | |
| 70° | 0° | 138 | | | | |
| 80° | 0° | 81 | | | | |
| 90° | 0° | 39 | | | | |
| 100° | 0° | 29 | | | | |
| 110° | 0° | 21 | | | | |
| 120° | 0° | 14 | | | | |
| 130° | 0° | 9 | | | | |
| 140° | 0° | 3 | | | | |
| 150° | 0° | 0 | | | | |
| 160° | 0° | 0 | | | | |
| 170° | 0° | 0 | | | | |
| 180° | 0° | 0 | | | | |

