


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-20945N-LD9

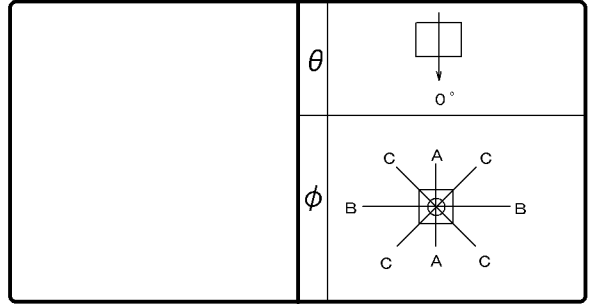

効 率	F ◡	0 %
	F ◒	100 %
	F ○	100 %
器具 光束		21000 lm

保守 率	良	0.88
	中	0.86
	否	0.81

前面	カバー (透明)
反射面	塗装 (白)

最大取付間隔	
A-A	1.23 H
B-B	1.23 H

備考

θ	φ		
	A-A	B-B	C-C
0°	516		
10°	516		
20°	489		
30°	421		
40°	317		
50°	181		
60°	76		
70°	24		
80°	3		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	固有照明率 (×0.01)																						
0.60	73	67	60	57	53	51	71	66	59	57	52	51	58	56	52	50	51	50	46	45			
0.80	85	78	74	69	66	63	83	76	73	68	65	63	71	67	64	62	63	62	58	57			
1.00	92	83	81	75	73	69	90	81	79	74	72	69	77	73	70	68	69	67	64	62			
1.25	99	88	88	81	80	75	96	87	86	80	79	75	83	79	77	74	76	73	70	68			
1.50	103	91	93	85	86	80	100	90	91	84	85	79	88	82	82	78	80	77	74	73			
2.00	110	96	102	91	95	87	107	95	99	90	93	86	95	88	90	85	87	84	81	79			
2.50	114	98	106	94	100	91	110	97	104	93	98	90	99	91	94	89	91	87	85	83			
3.00	117	100	110	96	105	93	113	99	107	95	102	93	102	94	98	91	94	90	87	86			
4.00	120	102	115	99	110	97	116	101	112	98	107	96	105	96	102	94	97	93	91	89			
5.00	122	103	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91			
10.00	126	106	124	105	122	103	122	105	120	103	118	102	112	101	111	100	104	98	97	95			

