


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDG11L-G/10 OW/2
光束	1340 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

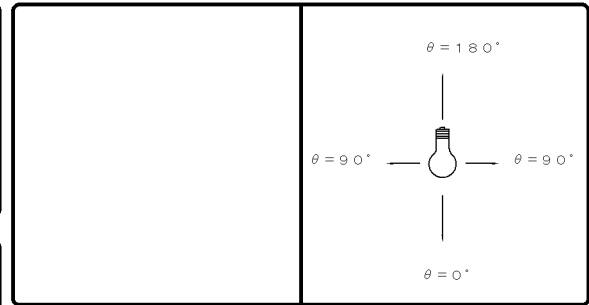

効率	F	%
	F	%
	F	100 %
	器具光束	1340 lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		128	
10°		128	
20°		127	
30°		125	
40°		122	
50°		117	
60°		111	
70°		103	
80°		94	
90°		84	
100°		73	
110°		62	
120°		51	
130°		41	
140°		32	
150°		23	
160°		16	
170°		11	
180°		0	

反射率 (%)	天井						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	70	50	30	50	30	30	10	0	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10				
室指数	照明率 (×0.01)																							
0.60	52	47	37	35	28	27	48	44	35	33	27	26	31	29	24	23	21	21	16	12				
0.80	62	56	47	44	37	35	57	53	44	41	35	33	39	37	31	30	27	27	21	17				
1.00	69	62	53	50	43	41	64	58	50	47	41	39	44	42	36	35	32	31	25	21				
1.25	76	67	61	56	51	47	70	63	57	53	48	45	50	47	42	41	37	36	30	25				
1.50	81	71	67	60	56	52	75	67	62	57	53	50	54	51	47	45	41	40	33	28				
2.00	89	77	76	68	66	60	82	73	71	64	62	57	62	57	55	52	48	46	40	34				
2.50	94	81	82	73	73	65	87	76	77	69	68	62	66	61	60	56	52	50	44	37				
3.00	98	84	87	76	78	70	90	79	81	72	73	66	70	65	64	60	56	53	47	40				
4.00	103	87	94	81	86	75	95	83	87	77	80	72	75	69	70	65	61	58	52	45				
5.00	106	90	98	84	91	79	98	85	91	80	85	75	79	72	74	68	64	61	55	48				
10.00	113	95	108	91	104	88	105	90	101	87	97	84	87	78	84	76	72	68	63	55				

