


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDG4N-G/G70 /40W/2
光束	410 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

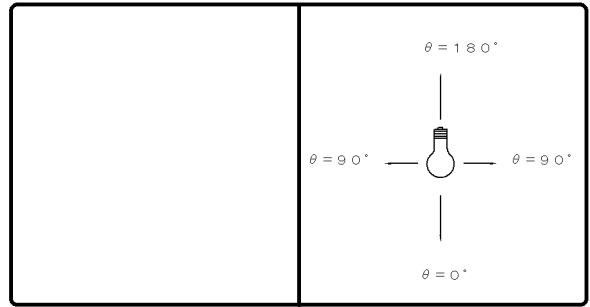

効率	F		%
	F		%
	F	100	%
	器具光束	410	lm

最大取付間隔	
A-A	1.43 H
B-B	1.43 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	69		
10°	69		
20°	68		
30°	65		
40°	62		
50°	57		
60°	52		
70°	46		
80°	39		
90°	32		
100°	25		
110°	18		
120°	13		
130°	8		
140°	5		
150°	3		
160°	1		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		照明率 (×0.01)																					
0.60		22	20	16	15	12	11	20	19	15	14	11	11	13	13	11	10	10	9	7	6		
0.80		26	24	20	18	16	15	25	22	19	18	15	14	17	16	14	13	13	12	10	9		
1.00		29	26	23	21	18	17	27	25	21	20	18	17	19	18	16	16	15	14	12	11		
1.25		32	28	26	24	21	20	30	27	25	23	21	19	22	21	19	18	17	17	14	13		
1.50		34	30	28	26	24	22	32	28	27	24	23	21	24	22	21	20	19	18	16	14		
2.00		37	33	32	29	28	26	35	31	30	27	27	25	27	25	24	23	22	21	19	17		
2.50		39	34	35	31	31	28	37	32	33	29	29	27	29	27	26	25	24	23	20	18		
3.00		41	35	37	32	33	29	38	34	35	31	31	28	31	28	28	26	25	24	22	20		
4.00		43	37	39	34	36	32	40	35	37	33	34	31	33	30	31	28	28	26	24	22		
5.00		44	38	41	35	38	33	42	36	39	34	36	32	34	31	32	30	29	28	25	23		
10.00		47	40	45	38	44	37	44	38	43	37	41	36	38	34	37	33	33	31	29	26		

