


東芝照明器具配光データシート

名称	LEDライン器具
形名	LEDL06903NL D9

保守率	良	0.69
	中	0.67
	否	0.63

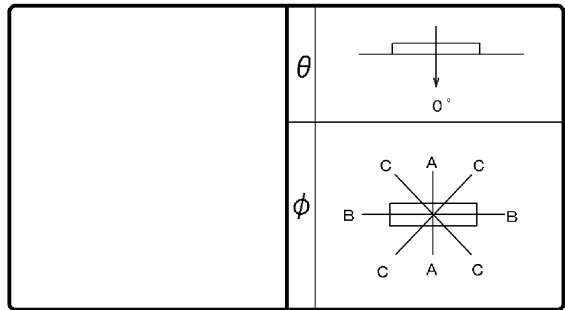

光源	名称	-
	形名	-
	光束	1290 lm × 1

効 率	F ◡	4 %
	F ◩	96 %
	F ○	100 %
	器具 光束	1290 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

前面	カバー (フロスト)
反射面	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	352	352	352
10°	346	345	346
20°	326	326	326
30°	293	293	293
40°	248	244	247
50°	196	187	193
60°	142	128	137
70°	94	73	86
80°	55	26	45
90°	27	1	16
100°	12	1	7
110°	8	1	6
120°	8	2	6
130°	8	2	6
140°	8	2	6
150°	7	2	5
160°	5	2	3
170°	2	2	2
180°	2	2	2

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																							
0.60	63	58	49	46	40	39	61	56	48	46	40	39	46	44	39	38	38	37	33	31					
0.80	75	68	61	57	52	50	73	66	60	56	51	49	57	55	50	48	48	47	43	41					
1.00	82	74	68	63	59	56	79	72	67	62	58	55	64	60	56	54	54	53	48	46					
1.25	90	80	77	70	67	63	86	78	75	69	66	62	71	67	64	61	61	60	55	53					
1.50	95	83	82	75	73	68	91	81	80	73	72	67	76	71	69	66	66	64	60	57					
2.00	103	89	92	82	83	76	99	87	89	81	81	75	84	78	78	73	74	72	67	65					
2.50	107	93	98	86	90	81	103	91	95	85	88	80	89	82	83	78	79	76	72	70					
3.00	111	95	102	90	95	85	106	93	99	88	92	84	93	85	87	82	83	79	76	73					
4.00	115	98	108	94	102	90	111	96	104	92	99	89	98	89	93	86	88	84	81	78					
5.00	118	100	112	96	107	93	113	98	108	95	103	92	101	92	97	89	91	87	84	81					
10.00	124	103	120	102	117	100	119	102	116	100	113	98	107	97	105	95	98	93	90	88					

