


# 東芝照明器具配光データシート

名称	LEDライン器具
形名	LEDL09903LL D9

保守率	良	0.69
	中	0.67
	否	0.63

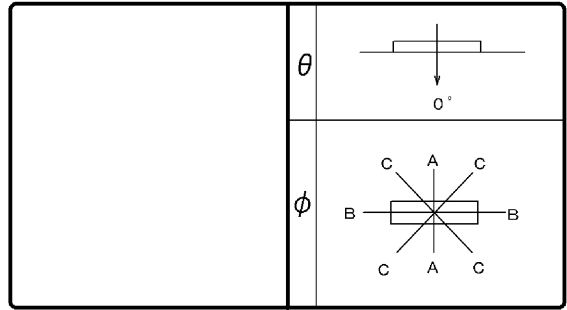

光源	名称	-
	形名	-
	光束	1750 lm x 1

効率	F	4%
	F	96%
	F	100%
	器具光束	1750 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

前面	カバー (フロスト)
反射面	

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	350	350	350
10°	344	344	344
20°	324	324	324
30°	291	290	291
40°	248	243	246
50°	196	186	192
60°	143	127	137
70°	95	73	87
80°	56	26	45
90°	28	1	16
100°	13	2	7
110°	9	2	6
120°	8	3	6
130°	8	3	6
140°	8	2	6
150°	6	3	5
160°	5	3	3
170°	3	3	2
180°	2	2	2

反射率 (%)	天井			80			70			50			30			20			0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	30	10	10	0		
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数	照明率 (x0.01)																				
0.60	63	58	49	46	40	39	61	56	48	45	40	39	46	44	39	38	38	37	33	31	
0.80	75	68	61	57	52	50	72	66	59	56	51	49	57	54	50	48	48	47	43	40	
1.00	82	73	68	63	59	56	79	72	67	62	58	55	63	60	56	54	54	53	48	46	
1.25	89	79	76	70	67	63	86	78	74	69	66	62	71	67	63	61	61	59	55	52	
1.50	94	83	82	74	73	68	91	81	80	73	71	67	76	71	69	65	66	64	59	57	
2.00	103	89	92	82	83	76	99	87	89	81	81	75	84	78	78	73	74	71	67	65	
2.50	107	92	97	86	90	81	103	90	94	85	87	80	89	82	83	78	79	76	72	69	
3.00	111	95	102	89	95	85	106	93	99	88	92	83	92	85	87	81	83	79	76	73	
4.00	115	98	108	94	102	90	110	96	104	92	99	88	97	89	93	86	88	84	80	78	
5.00	118	100	112	96	107	93	113	98	108	94	103	91	100	92	97	89	91	87	83	81	
10.00	124	103	120	101	117	100	119	102	116	100	113	98	107	97	105	95	98	93	90	88	

