

東芝照明器具配光データシート


名称	LED照明器具
形名	LEDL-15903L-LD9

光源	名称	LEDランプ
	形名	-
	光束	3120 lm × 1

前面	カバー (フロスト)
反射面	

保守率	良	0.69
	中	0.67
	否	0.63

効率	F	7%
	F	93%
	F	100%
	器具光束	3120 lm

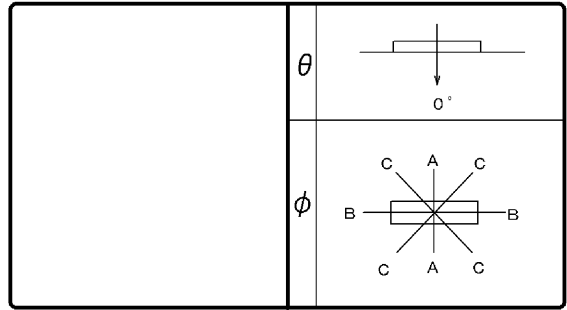

最大取付間隔	
A-A	1.2 H
B-B	1.3 H

備考

θ \ φ	A-A	B-B	C-C
0°	347	338	341
10°	337	327	328
20°	313	313	311
30°	275	288	276
40°	227	253	234
50°	175	197	184
60°	125	135	133
70°	81	84	86
80°	49	37	47
90°	25	11	19
100°	14	11	11
110°	12	11	11
120°	11	11	11
130°	12	6	10
140°	12	7	10
150°	11	7	9
160°	5	2	3
170°	3	3	3
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																							
0.60	62	57	48	46	40	38	60	55	47	45	39	38	45	43	38	37	37	36	32	30				
0.80	74	67	60	56	51	49	71	65	58	55	50	48	56	53	48	47	47	46	41	39				
1.00	81	73	67	62	58	55	78	71	65	61	57	54	62	59	55	53	53	51	47	44				
1.25	88	79	75	69	66	62	85	76	73	68	65	61	69	65	62	59	59	58	53	50				
1.50	93	82	81	74	72	67	90	80	79	72	70	66	74	69	67	64	64	62	57	55				
2.00	101	88	91	81	82	75	97	86	88	79	80	74	82	76	76	72	72	69	65	62				
2.50	106	91	96	85	89	80	102	89	93	84	86	79	87	80	81	76	77	74	70	67				
3.00	110	94	101	88	94	84	105	92	97	87	91	82	91	83	85	80	81	77	73	70				
4.00	114	97	107	93	101	89	109	95	103	91	97	87	96	87	91	84	86	82	78	75				
5.00	117	99	111	95	105	92	112	97	106	93	102	90	99	90	95	87	89	84	81	78				
10.00	123	103	119	101	116	99	117	101	114	99	111	97	105	95	103	94	96	90	88	85				

