


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEKD60951L-LD9

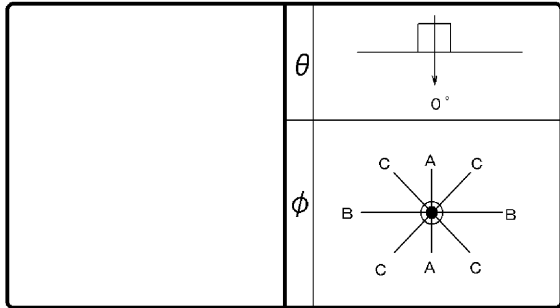

効率	F	0 %
	F	100 %
	F	100 %
	器具光束	5200 lm

保守率	良	0.77
	中	0.72
	否	0.68

前面	カバー (透明)
反射面	銀色梨地

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	696		
10°	709		
20°	685		
30°	544		
40°	268		
50°	87		
60°	26		
70°	5		
80°	2		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		10		0		0		0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室指数	固有照明率 (×0.01)																																				
0.60	82	75	71	68	65	63	80	75	71	67	65	63	69	67	64	62	63	62	59	58																	
0.80	94	86	84	79	78	75	92	85	83	79	77	75	81	78	76	74	75	74	71	70																	
1.00	99	89	90	83	83	79	97	88	88	83	83	79	86	82	81	78	80	77	75	74																	
1.25	105	93	96	88	89	84	102	92	94	87	88	83	91	86	86	83	84	82	79	78																	
1.50	108	96	100	91	94	87	106	94	98	90	93	87	95	89	90	86	88	85	82	81																	
2.00	114	99	107	95	101	92	111	98	104	95	99	92	100	93	96	91	93	89	87	86																	
2.50	117	101	111	98	105	95	113	100	108	97	103	94	103	95	99	93	96	92	90	88																	
3.00	119	102	113	99	109	97	115	101	111	98	106	96	105	97	102	95	98	94	92	90																	
4.00	122	104	117	102	113	100	118	103	114	101	111	99	108	99	105	97	100	96	94	92																	
5.00	124	105	120	103	116	101	120	103	116	102	113	100	110	100	107	99	102	97	95	94																	
10.00	127	106	125	105	123	105	123	105	121	104	119	104	113	102	112	102	106	100	98	97																	

