

東芝照明器具配光データシート


名 称	東芝スポットライト
形 名	IHB-2060F (W) -40

光 源	名 称	ネオハロクールH
	形 名	JD110V85WN-EH
	光 束	1680 lm × 1

前 面	ガラス (クリアー)
反射面	メタルダイクロイック ミラー

保 守 率	良	0.79
	中	0.74
	否	0.70

効 率	F	0 %
	F	60 %
	F	60 %
	器具 光束	1005 lm

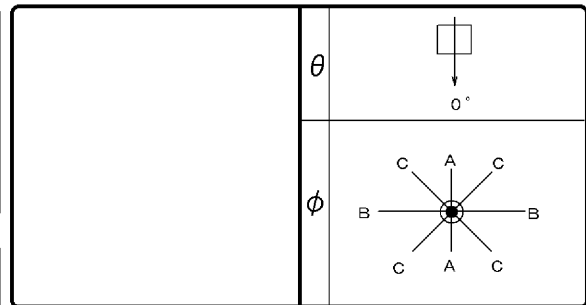

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備 考	
--------	--

光度 (cd/1000lm)			
0°	1071	25°	478
1°		30°	297
2°		35°	143
3°		40°	80
4°		45°	18
5°	939	50°	10
6°		55°	5
7°		60°	3
8°		65°	1
9°		70°	1
10°	743	75°	1
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	610		
16°			
17°			
18°			
19°			
20°	534		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照 明 率 (×0.01)																						
0.60		51	47	45	42	41	40	50	46	44	42	41	40	43	42	40	39	40	39	38	37			
0.80		56	51	50	47	47	45	55	50	50	47	46	45	49	46	46	44	45	44	42	42			
1.00		60	54	55	51	51	49	59	54	54	51	51	48	53	50	50	48	49	48	46	45			
1.25		63	56	58	53	54	51	62	56	57	53	54	51	55	52	53	50	51	50	48	48			
1.50		65	58	61	55	57	53	64	57	59	55	56	53	57	54	55	52	53	52	50	49			
2.00		68	59	64	57	61	55	66	59	63	57	60	55	60	56	58	54	56	54	52	52			
2.50		70	60	66	58	63	57	68	60	65	58	62	57	62	57	60	56	57	55	54	53			
3.00		71	61	68	59	65	58	69	60	66	59	64	58	63	58	61	57	59	56	55	54			
4.00		73	62	70	61	68	60	71	61	68	60	66	59	65	59	63	58	60	57	56	55			
5.00		74	63	72	62	70	61	72	62	70	61	68	60	66	60	65	59	61	58	57	56			
10.00		76	64	75	64	74	63	74	63	73	63	72	63	68	62	68	61	64	60	60	59			

