



東芝照明器具配光データシート

階段通路誘導灯

名称	非常用白熱灯組込形 (電源別置)
形名	FTE-22805N

保守率	0.74
光束換算係数	0.7




光源	平常時	FL20SS・W/1 8 × 2
	非常時	PIL100V40W S35E17 × 1
光束	定格	585 lm
	非常時	409 lm


前面	カバー (乳白)
反射面	
塗装 (白)	

備考


取付高さ	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0
単体配置	A1	3.6	3.7	3.7	3.8	3.8	3.7	3.5	3.3	2.7
	A'1	-	-	-	-	-	-	-	-	-
直線配置 四角配置	B1	3.7	3.8	3.8	3.9	3.8	3.7	3.5	3.2	2.3
	A2									
	B2									
	A4									
B4										

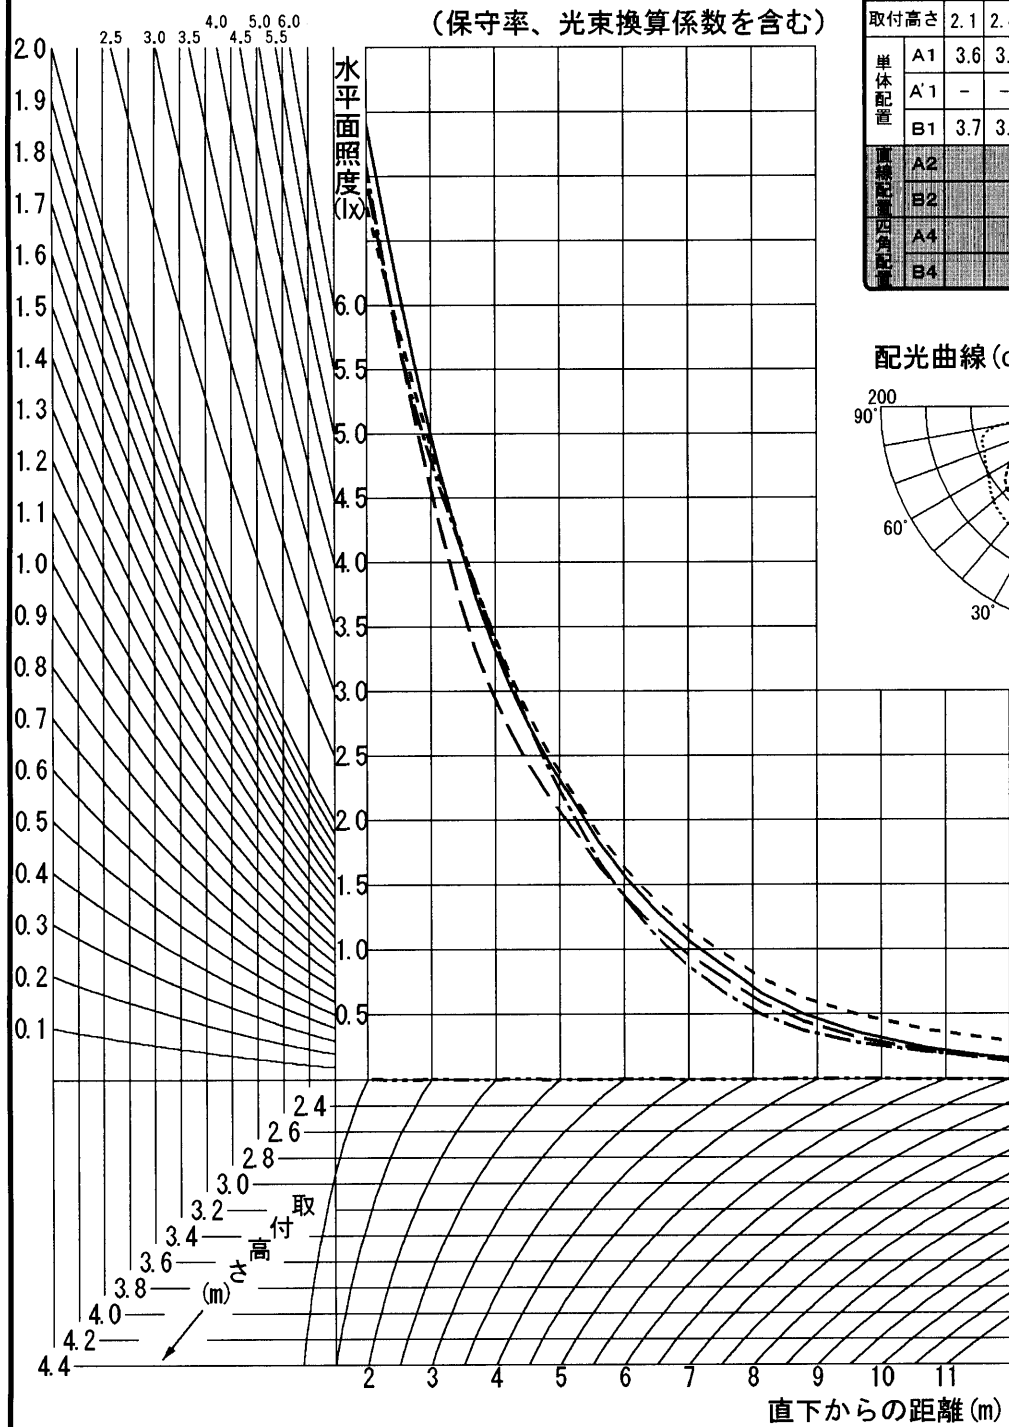

配光曲線 (cd/1000lm)

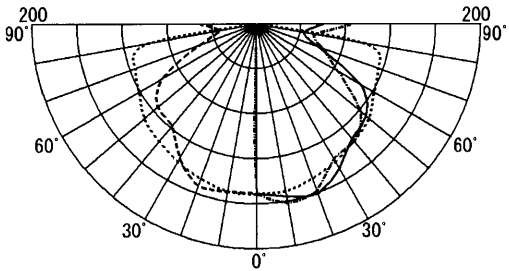

- φ = 0°
- - - 45°
- 90°
- · - · 135°
- · - · - · 180°


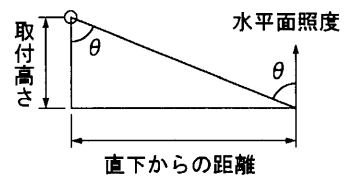


東芝照明器具配光データシート

階段通路誘導灯

名称	非常用白熱灯組込形 (電源別置)
形名	FTE-22805N

保守率	0.74
光束換算係数	0.7



光源	平常時	FL20SS・W/1 8 × 2
	非常時	PIL100V40W S35E17 × 1
光束	定格	585 lm
	非常時	409 lm

前面	カバー (乳白)
反射面	塗装 (白)

備考	
----	--

θ \ φ	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')
0°	151	151	151	151	151
10°	156	161	151	151	0
20°	161	158	146	153	0
30°	148	138	141	138	0
40°	133	136	136	118	0
50°	128	121	131	115	0
60°	108	83	121	97	0
70°	58	63	115	53	0
80°	43	53	100	33	0
90°	60	85	0	50	0
100°	60	80	0	45	0
110°	55	75	0	45	0
120°	50	70	0	40	0
130°	40	60	0	35	0
140°	30	43	0	25	0
150°	20	30	0	20	0
160°	10	15	0	5	0
170°	5	0	0	0	0
180°	0	0	0	0	0



取り付け高さ(m)		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	
階段幅 (1/2)	1.0m	1 x X	3.4	3.7	3.9	3.9	3.9	3.7	—	—	—
		0.5 x x	4.4	4.9	5.3	5.5	5.6	5.6	5.6	5.5	5.3
	1.5m	1 x X	3.1	3.6	3.7	3.7	3.7	3.5	—	—	—
		0.5 x x	4.2	4.8	5.2	5.3	5.5	5.5	5.5	5.4	5.2
	2.0m	1 x X	2.8	3.3	3.4	3.5	3.5	3.3	2.9	—	—
		0.5 x x	4.0	4.6	5.0	5.2	5.2	5.3	5.3	5.2	5.0
	2.5m	1 x X	2.4	2.9	3.0	3.1	3.1	2.9	2.3	—	—
		0.5 x x	3.7	4.3	4.8	4.9	5.0	5.1	5.1	5.0	4.8
	3.0m	1 x X	1.7	2.4	2.5	2.6	2.6	2.3	1.6	—	—
		0.5 x x	3.2	4.0	4.4	4.7	4.7	4.8	4.8	4.7	4.5

東芝照明器具配光データシート

階段通路誘導灯

名称	非常用白熱灯組込形 (電源別置)
形名	FTE-22805N

保守率	0.74
光束換算係数	0.7



光源	平常時	FL20SS・W/1 8 × 2
	非常時	PIL100V40W S35E17 × 1
光束	定格	585 lm
	非常時	409 lm

前面	カバー (乳白)
反射面	塗装 (白)

備考

配置表 (保守率、光束換算係数を含む)

取付高さ	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	3.6	3.6	3.6	3.7	3.7	3.7	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
	A'1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B1	3.7	3.7	3.8	3.8	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.8
直線配置	A2															
	B2															
四角配置	A4															
	B4															

取付高さ	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	3.8	3.7	3.7	3.7	3.6	3.6	3.6	3.5	3.5	3.3	3.1	2.7	2.0	-	-
	A'1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B1	3.8	3.8	3.8	3.7	3.7	3.7	3.6	3.6	3.5	3.2	2.9	2.3	1.4	-	-
直線配置	A2															
	B2															
四角配置	A4															
	B4															



取付高さ	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単体配置	A1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	A'1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
直線配置	A2															
	B2															
四角配置	A4															
	B4															

東芝照明器具配光データシート

階段通路誘導灯

名称	非常用白熱灯組込形 (電源別置)
形名	FTE-22805N

保守率	0.74
光束換算係数	0.7

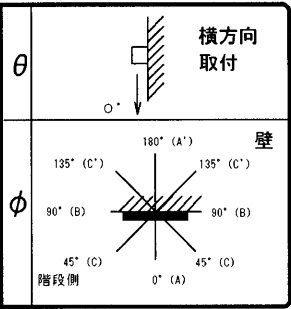

光源	平常時	FL20SS・W/1 8 × 2
	非常時	PIL100V40W S35E17 × 1
光束	定格	585 lm
	非常時	409 lm

前面	カバー (乳白)
反射面	塗装 (白)

備考

階段配置表 (保守率、光束換算係数を含む)

		取り付け高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	
階段幅	1.0m	1lx	X	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.8	3.8	3.8	3.7	3.7	3.7	
		0.5lx	x	5.3	5.4	5.5	5.5	5.5	5.5	5.5	5.6	5.5	5.6	5.6	5.6	5.6	5.6	5.6	5.6	
	1.5m	1lx	X	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.6	3.6	3.5	3.5	3.5	
		0.5lx	x	5.2	5.3	5.3	5.3	5.3	5.4	5.4	5.4	5.4	5.5	5.4	5.5	5.5	5.5	5.5	5.5	
	2.0m	1lx	X	3.4	3.4	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.4	3.4	3.4	3.3	3.3	3.1
		0.5lx	x	5.1	5.1	5.1	5.2	5.2	5.2	5.2	5.2	5.3	5.2	5.3	5.2	5.2	5.2	5.3	5.3	5.3
2.5m	1lx	X	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.0	3.0	3.0	2.9	2.8	
	0.5lx	x	4.8	4.8	4.9	4.9	4.9	4.9	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.1	5.1	
3.0m	1lx	X	2.6	2.6	2.6	2.6	2.6	2.6	2.7	2.7	2.7	2.7	2.6	2.6	2.5	2.5	2.5	2.3	2.2	
	0.5lx	x	4.5	4.5	4.5	4.6	4.7	4.6	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.8	4.8	4.8	

		取り付け高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
階段幅	1.0m	1lx	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		0.5lx	x	5.6	5.6	5.6	5.6	5.6	5.6	5.5	5.5	5.5	5.3	-	-	-	-	-	-
	1.5m	1lx	X	3.4	3.3	3.2	-	-	-	-	-	-	-	-	-	-	-	-	-
		0.5lx	x	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.4	5.4	5.2	-	-	-	-	-
	2.0m	1lx	X	3.1	3.1	2.9	2.9	2.6	-	-	-	-	-	-	-	-	-	-	-
		0.5lx	x	5.3	5.3	5.3	5.3	5.3	5.3	5.2	5.2	5.2	5.0	-	-	-	-	-	-
2.5m	1lx	X	2.7	2.6	2.5	2.3	2.0	-	-	-	-	-	-	-	-	-	-	-	
	0.5lx	x	5.1	5.1	5.1	5.1	5.1	5.1	5.0	5.0	5.0	4.8	4.3	-	-	-	-	-	
3.0m	1lx	X	2.1	1.9	1.7	1.6	-	-	-	-	-	-	-	-	-	-	-	-	
	0.5lx	x	4.8	4.8	4.8	4.8	4.8	4.8	4.7	4.7	4.7	4.5	4.0	-	-	-	-	-	

		取り付け高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
階段幅	1.0m	1lx	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		0.5lx	x	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1.5m	1lx	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		0.5lx	x	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2.0m	1lx	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		0.5lx	x	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2.5m	1lx	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	0.5lx	x	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
3.0m	1lx	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	0.5lx	x	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	