



東芝照明器具配光データシート


名 称	街路照明器具
形 名	HG-40144

保守率	良	0.73
	中	0.69
	否	0.65





光源	名 称	蛍光水銀ランプ
	形 名	HF400X
	光束	22000 lm × 1

効 率	F $\frac{1}{2}$	2.0 %
	F $\frac{3}{4}$	38.7 %
	F $\bigcirc$	40.6 %
	器具 光束	8937 lm

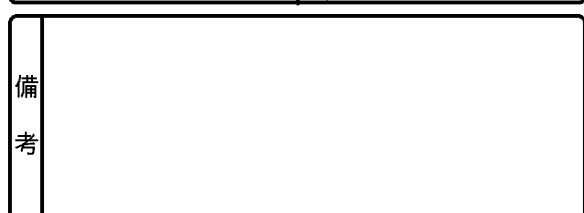

前 面	カバー (フロスト)
反射面	塗装 (銀色)

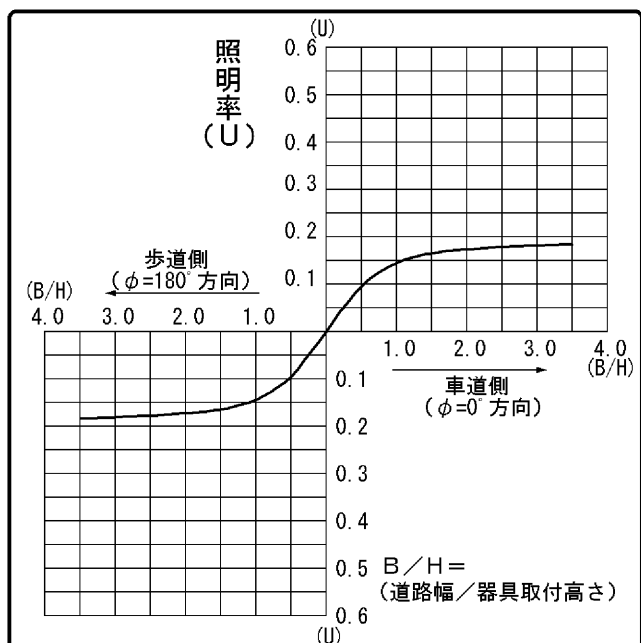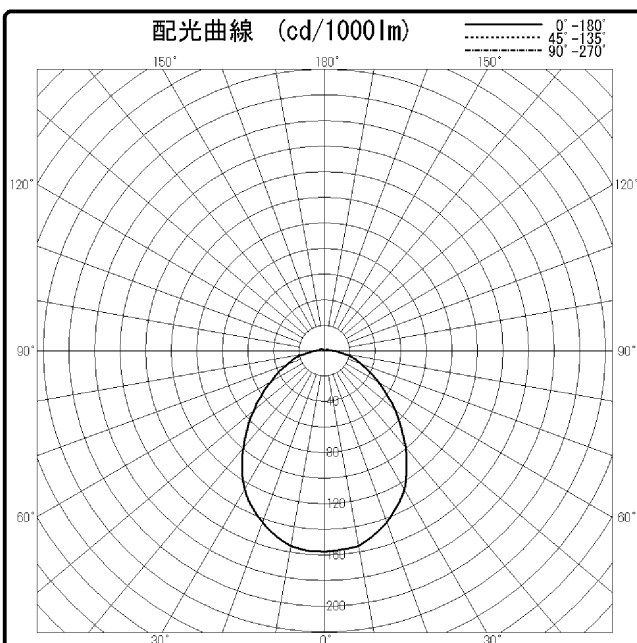

		光度 (cd/1000lm)				
θ	ϕ	0°	45°	90°	135°	180°
0°		157				
10°		155				
20°		143				
30°		125				
40°		99				
50°		72				
60°		48				
70°		31				
80°		18				
90°		8				
100°		5				
110°		4				
120°		3				
130°		2				
140°		1				
150°		1				
160°		0				
170°		0				
180°		0				

