


東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30203

保 守 率	0.79
光 束 換 算 係 数	1.00

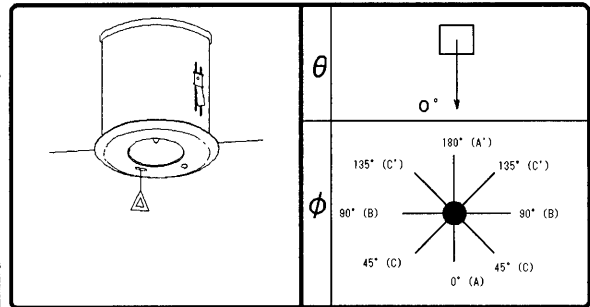

光 源	平常時	×
	非常時	JB10. 8V30W -MM × 1
光 束	定 格	710 lm
	非常時	539 lm




前 面
下面開放
反射面
アルミ鏡面仕上

備 考 中天井用

配置表 (保守率、光束換算係数を含む)

取付高さ	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0
単 体 配 置										
A1	5.4	5.7	5.8	6.0	6.2	6.5	6.7	6.9	2.7	2.0
A'1	5.4	5.7	5.8	6.0	6.2	6.5	6.7	6.9	2.7	2.0
B1	5.4	5.7	5.8	6.0	6.2	6.5	6.7	6.9	2.7	2.0
B'1	5.4	5.7	5.8	6.0	6.2	6.5	6.7	6.9	2.7	2.0
直線配置										
A2	12.6	13.6	14.4	15.2	15.8	16.4	17.0	17.4	18.4	19.2
B2	12.6	13.6	14.4	15.2	15.8	16.4	17.0	17.4	18.4	19.2
四角配置										
A4	10.4	11.3	11.9	12.9	14.1	15.0	15.6	16.1	16.9	17.5
B4	10.4	11.3	11.9	12.9	14.1	15.0	15.6	16.1	16.9	17.5
壁からの最大取付距離										
A0	3.9	4.2	4.3	4.2	3.9	3.8	3.9	4.0	2.9	0.2
A'O	3.9	4.2	4.3	4.2	3.9	3.8	3.9	4.0	2.9	0.2
B0	3.9	4.2	4.3	4.2	3.9	3.8	3.9	4.0	2.9	0.2
B'O	3.9	4.2	4.3	4.2	3.9	3.8	3.9	4.0	2.9	0.2

配光曲線 (cd/1000lm)

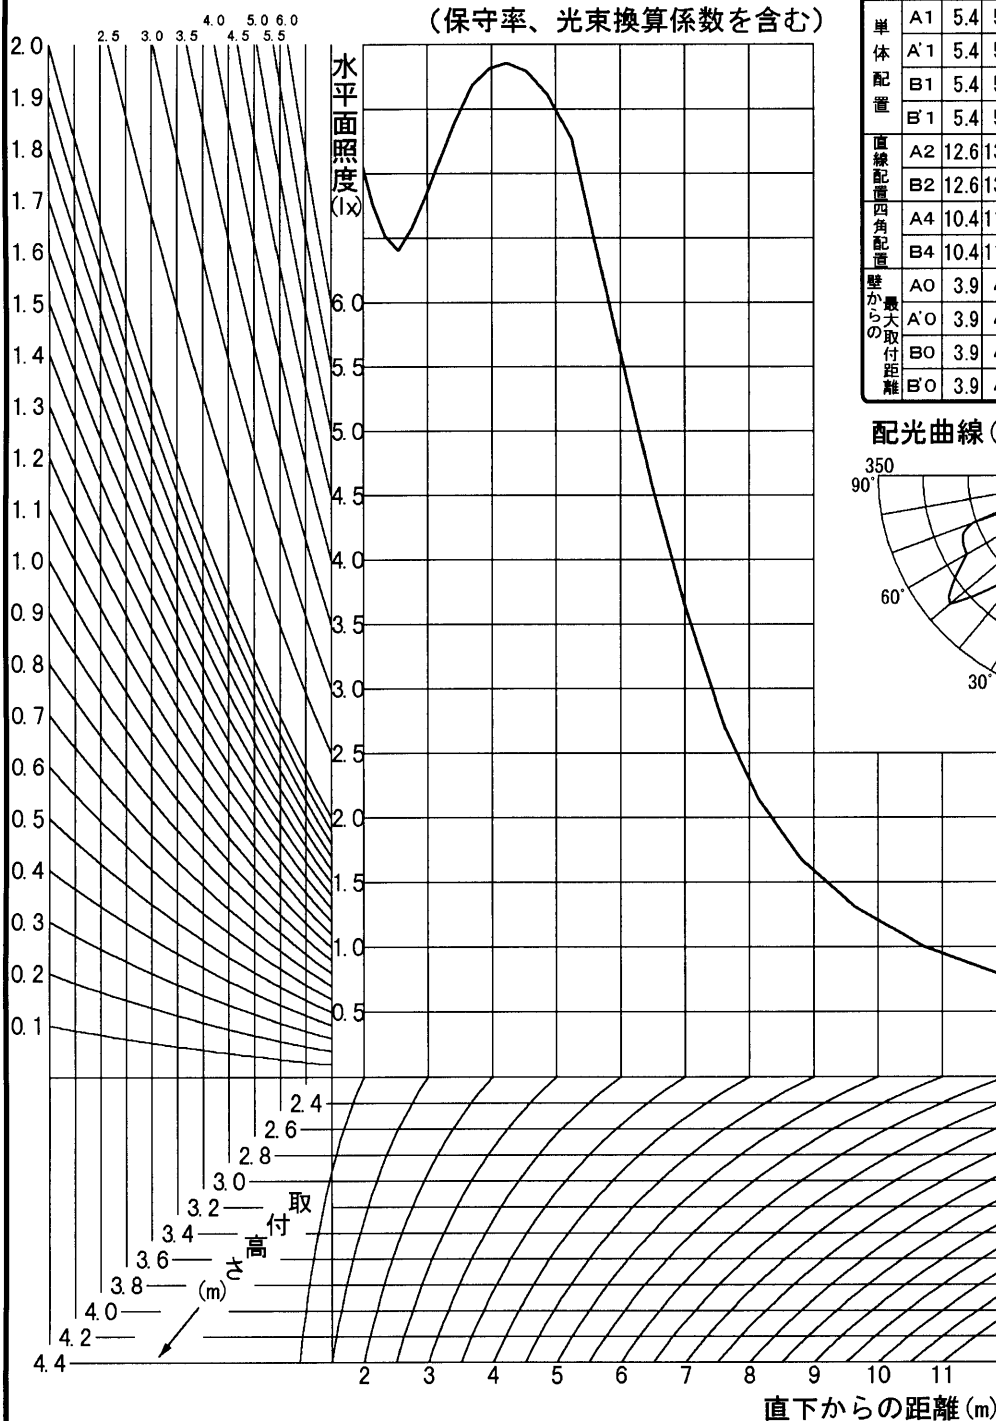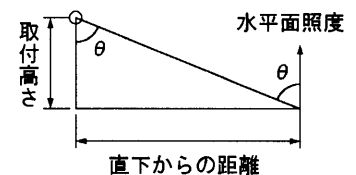
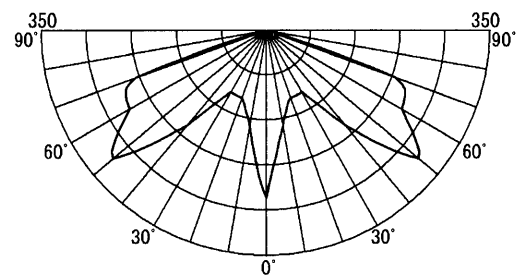


東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30203

保 守 率	0.79
光 束 換 算 係 数	1.00



光源	平常時	×
	非常時	JB10. 8V30W -MM × 1
光束	定 格	710 lm
	非常時	539 lm

前 面
下面開放
反射面
アルミ鏡面仕上

備 考 中天井用

光度 (cd/1000lm)						
θ \ φ	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')	
0°	260					
10°	152					
20°	112					
30°	112					
40°	194					
50°	311					
60°	245					
70°	215					
80°	2					
90°	0					
100°	0					
110°	0					
120°	0					
130°	0					
140°	0					
150°	0					
160°	0					
170°	0					
180°	0					



器具直下からの各方向への指定照度が得られる距離 (m) (保守率、光束換算係数を含む)																
照度 (lx)	取付け高さ (m)	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0	8.0	10.0	12.0	14.0	16.0
1	0°	5.4	5.7	5.8	6.0	6.2	6.5	6.7	6.9	2.7	2.0	1.4	0.4	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	6.5	7.0	7.3	7.7	8.0	8.3	8.6	8.8	9.3	9.7	4.4	2.8	1.7	0.7	-
	45°															
	90°															
	135°															
	180°															
0.25	0°	7.4	8.1	8.5	9.2	10.1	10.7	11.1	11.4	12.0	12.5	13.0	13.7	5.5	4.0	2.7
	45°															
	90°															
	135°															
	180°															

東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30203

保 守 率	0.79
光 束 換 算 係 数	1.00



光源	平常時	×
	非常時	JB10. 8V30W -MM × 1
光束	定 格	710 lm
	非常時	539 lm

前 面	下面開放
反射面	アルミ鏡面仕上

備 考 中天井用

配置表 (保守率、光束換算係数を含む)

取 付 高 さ		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単 体 配 置	A1	5.4	5.5	5.6	5.7	5.7	5.8	5.8	5.9	5.9	6.0	6.1	6.1	6.2	6.2	6.2	6.3
	A'1	5.4	5.5	5.6	5.7	5.7	5.8	5.8	5.9	5.9	6.0	6.1	6.1	6.2	6.2	6.2	6.3
	B1	5.4	5.5	5.6	5.7	5.7	5.8	5.8	5.9	5.9	6.0	6.1	6.1	6.2	6.2	6.2	6.3
	B'1	5.4	5.5	5.6	5.7	5.7	5.8	5.8	5.9	5.9	6.0	6.1	6.1	6.2	6.2	6.2	6.3
直 線 配 置	A2	12.6	13.0	13.4	13.6	14.0	14.4	14.6	14.8	15.0	15.2	15.2	15.4	15.6	15.8	15.8	16.0
	B2	12.6	13.0	13.4	13.6	14.0	14.4	14.6	14.8	15.0	15.2	15.2	15.4	15.6	15.8	15.8	16.0
四 角 配 置	A4	10.4	10.7	11.0	11.3	11.6	11.9	12.1	12.4	12.7	12.9	13.2	13.4	13.6	13.9	14.1	14.3
	B4	10.4	10.7	11.0	11.3	11.6	11.9	12.1	12.4	12.7	12.9	13.2	13.4	13.6	13.9	14.1	14.3
壁からの 最大取付距離	A0	3.9	4.0	4.1	4.2	4.3	4.3	4.3	4.4	4.3	4.2	4.2	4.2	4.1	4.1	3.9	3.9
	A'O	3.9	4.0	4.1	4.2	4.3	4.3	4.3	4.4	4.3	4.2	4.2	4.2	4.1	4.1	3.9	3.9
	B0	3.9	4.0	4.1	4.2	4.3	4.3	4.3	4.4	4.3	4.2	4.2	4.2	4.1	4.1	3.9	3.9
	B'O	3.9	4.0	4.1	4.2	4.3	4.3	4.3	4.4	4.3	4.2	4.2	4.2	4.1	4.1	3.9	3.9

取 付 高 さ		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単 体 配 置	A1	6.3	6.4	6.4	6.5	6.5	6.6	6.6	6.6	6.7	6.9	7.0	2.7	2.2	2.0	1.7	1.4
	A'1	6.3	6.4	6.4	6.5	6.5	6.6	6.6	6.6	6.7	6.9	7.0	2.7	2.2	2.0	1.7	1.4
	B1	6.3	6.4	6.4	6.5	6.5	6.6	6.6	6.6	6.7	6.9	7.0	2.7	2.2	2.0	1.7	1.4
	B'1	6.3	6.4	6.4	6.5	6.5	6.6	6.6	6.6	6.7	6.9	7.0	2.7	2.2	2.0	1.7	1.4
直 線 配 置	A2	16.2	16.2	16.4	16.4	16.6	16.6	16.8	16.8	17.0	17.4	17.8	18.4	18.8	19.2	19.4	19.6
	B2	16.2	16.2	16.4	16.4	16.6	16.6	16.8	16.8	17.0	17.4	17.8	18.4	18.8	19.2	19.4	19.6
四 角 配 置	A4	14.5	14.8	14.9	15.0	15.1	15.3	15.4	15.5	15.6	16.1	16.5	16.9	17.2	17.5	17.9	18.2
	B4	14.5	14.8	14.9	15.0	15.1	15.3	15.4	15.5	15.6	16.1	16.5	16.9	17.2	17.5	17.9	18.2
壁からの 最大取付距離	A0	3.8	3.8	3.7	3.8	3.8	3.8	3.9	3.9	3.9	4.0	4.1	2.9	1.7	0.2	0.2	0.2
	A'O	3.8	3.8	3.7	3.8	3.8	3.8	3.9	3.9	3.9	4.0	4.1	2.9	1.7	0.2	0.2	0.2
	B0	3.8	3.8	3.7	3.8	3.8	3.8	3.9	3.9	3.9	4.0	4.1	2.9	1.7	0.2	0.2	0.2
	B'O	3.8	3.8	3.7	3.8	3.8	3.8	3.9	3.9	3.9	4.0	4.1	2.9	1.7	0.2	0.2	0.2



取 付 高 さ	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単 体 配 置	A1	1.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	A'1	1.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B1	1.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B'1	1.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
直 線 配 置	A2	7.4	6.0	5.6	5.0	4.4	3.6	3.0	2.6	2.0	1.4	-	-	-	-	-
	B2	7.4	6.0	5.6	5.0	4.4	3.6	3.0	2.6	2.0	1.4	-	-	-	-	-
四 角 配 置	A4	7.4	6.0	5.6	5.0	4.4	3.6	3.0	2.6	2.0	1.4	-	-	-	-	-
	B4	7.4	6.0	5.6	5.0	4.4	3.6	3.0	2.6	2.0	1.4	-	-	-	-	-
壁からの 最大取付距離	A0	6.6	7.3	7.4	7.7	8.0	8.5	8.8	3.5	3.2	3.1	-	-	-	-	-
	A'O	6.6	7.3	7.4	7.7	8.0	8.5	8.8	3.5	3.2	3.1	-	-	-	-	-
	B0	6.6	7.3	7.4	7.7	8.0	8.5	8.8	3.5	3.2	3.1	-	-	-	-	-
	B'O	6.6	7.3	7.4	7.7	8.0	8.5	8.8	3.5	3.2	3.1	-	-	-	-	-

東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30203

保 守 率	0.79
光 束 換 算 係 数	1.00



光 源	平常時	×
	非常時	JB10. 8V30W -MM × 1
光 束	定 格	710 lm
	非常時	539 lm

前 面
下面開放
反射面
アルミ鏡面仕上

備 考 中天井用

器具直下からの各方面への指定照度が得られる距離(m) (保守率、光束換算係数を含む)

取付け高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
1	0°	5.4	5.5	5.6	5.7	5.7	5.8	5.8	5.9	5.9	6.0	6.1	6.1	6.2	6.2	6.2	6.3
	45°																
	90°																
	135°																
	180°																
0.5	0°	6.5	6.7	6.8	7.0	7.1	7.3	7.5	7.5	7.6	7.7	7.8	7.8	7.9	8.0	8.0	8.1
	45°																
	90°																
	135°																
	180°																
0.25	0°	7.4	7.6	7.9	8.1	8.2	8.5	8.6	8.8	9.0	9.2	9.4	9.6	9.7	9.9	10.1	10.2
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
1	0°	6.3	6.4	6.4	6.5	6.5	6.6	6.6	6.6	6.7	6.9	7.0	7.7	2.2	2.0	1.7	1.4
	45°																
	90°																
	135°																
	180°																
0.5	0°	8.2	8.2	8.3	8.3	8.4	8.5	8.5	8.6	8.6	8.8	9.1	9.3	9.5	9.7	9.8	4.4
	45°																
	90°																
	135°																
	180°																
0.25	0°	10.3	10.5	10.6	10.7	10.8	10.8	10.9	11.0	11.1	11.4	11.7	12.0	12.2	12.5	12.7	13.0
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
照度 (lx)	φ																
1	0°	1.2	1.0	0.7	0.4	0.0	-	-	-	-	-	-	-	-	-	-	-
	45°																
	90°																
	135°																
	180°																
0.5	0°	3.9	3.2	3.0	2.8	2.4	2.1	1.9	1.7	1.5	1.3	1.0	0.7	0.3	-	-	-
	45°																
	90°																
	135°																
	180°																
0.25	0°	13.1	13.3	13.6	13.7	13.8	14.0	6.1	5.5	4.7	4.4	4.2	4.0	3.7	3.4	3.0	2.7
	45°																
	90°																
	135°																
	180°																