

東芝照明器具配光データシート


非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30204

保 守 率	0.79
光 束 換 算 係 数	1.00

光 源	平常時	×
	非常時	JB10. 8V30W -MH × 1
光 束	定 格	710 lm
	非常時	539 lm

前 面
下面開放
反射面
アルミ鏡面仕上



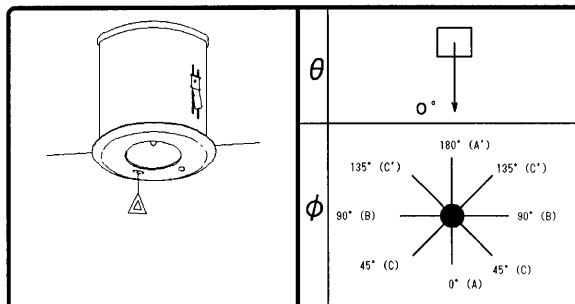


備 考	高天井用
-----	------

配置表 (保守率、光束換算係数を含む)

取付高さ	5.0	6.0	7.0	8.0	9.0	10.0	12.0	14.0	16.0	18.0
単 体 配 置										
A1	5.9	6.5	6.9	7.3	2.7	1.6	-	-	-	-
A'1	5.9	6.5	6.9	7.3	2.7	1.6	-	-	-	-
B1	5.9	6.5	6.9	7.3	2.7	1.6	-	-	-	-
B'1	5.9	6.5	6.9	7.3	2.7	1.6	-	-	-	-
直線配置四角配置										
A2	15.6	15.8	16.2	17.4	18.6	19.4	20.8	4.2	2.4	-
B2	15.6	15.8	16.2	17.4	18.6	19.4	20.8	4.2	2.4	-
A4	13.4	15.0	15.7	16.0	16.1	16.5	18.2	4.2	2.4	-
B4	13.4	15.0	15.7	16.0	16.1	16.5	18.2	4.2	2.4	-
壁からの最大取付距離										
AO	4.3	3.1	2.5	4.0	3.6	2.1	0.2	8.3	9.6	-
A'O	4.3	3.1	2.5	4.0	3.6	2.1	0.2	8.3	9.6	-
BO	4.3	3.1	2.5	4.0	3.6	2.1	0.2	8.3	9.6	-
B'O	4.3	3.1	2.5	4.0	3.6	2.1	0.2	8.3	9.6	-

配光曲線 (cd/1000lm)

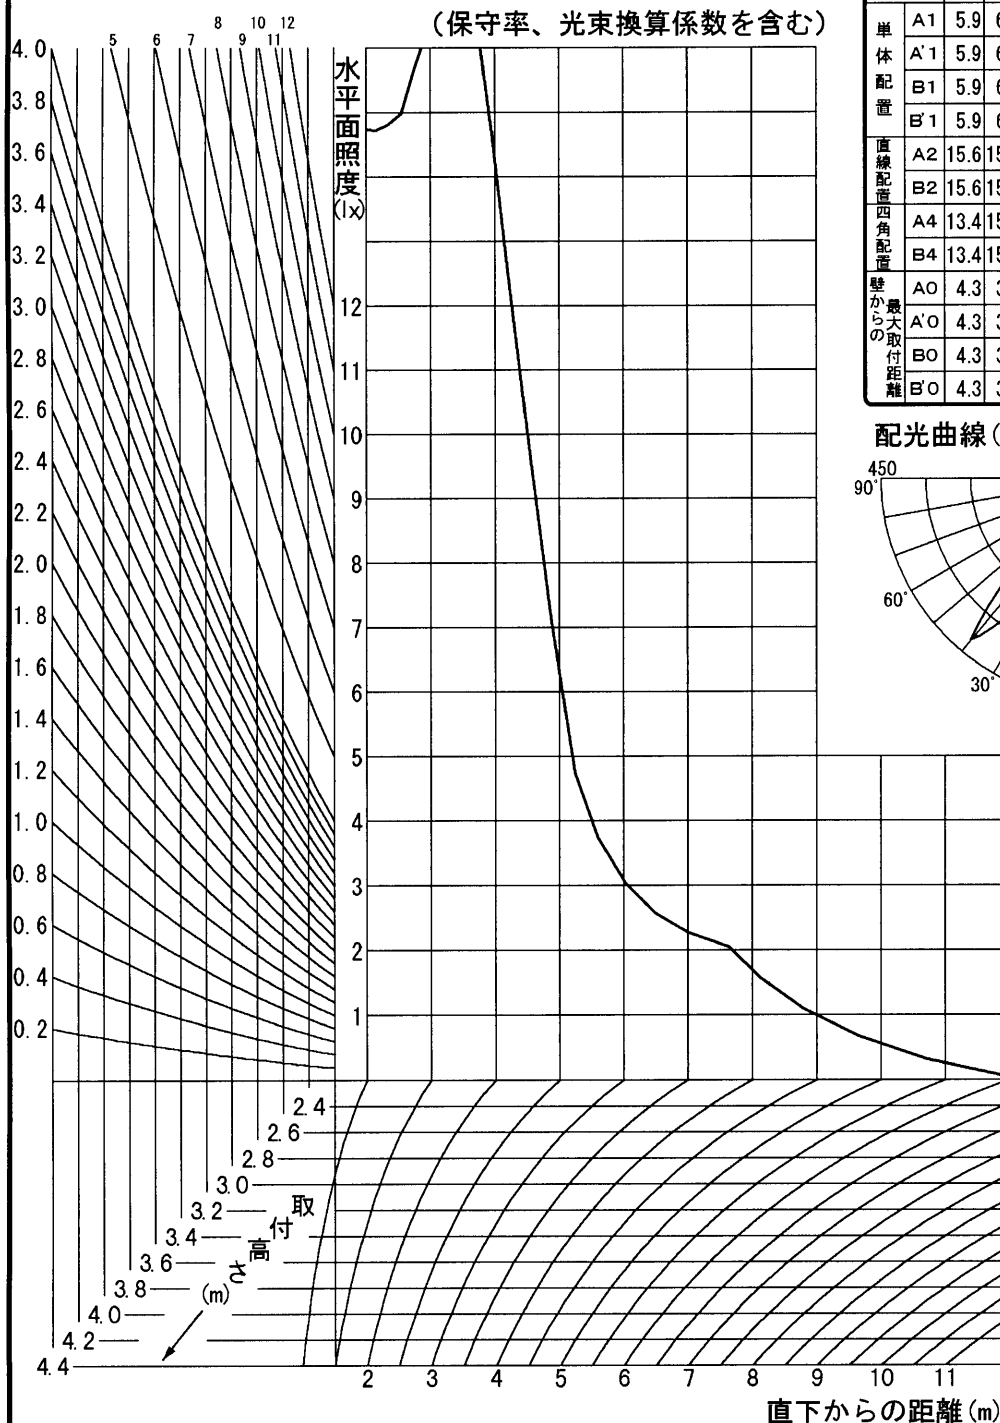
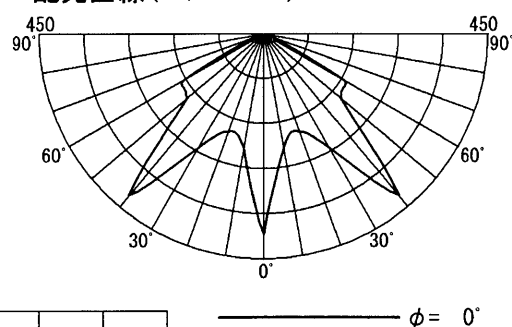


東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30204

保 守 率	0.79
光 束 換 算 係 数	1.00



光源	平常時	×
	非常時	JB10. 8V30W -MH × 1
光束	定 格	710 lm
	非常時	539 lm

前 面
下面開放
反射面
アルミ鏡面仕上

備 考 高天井用

光度 (cd/1000lm)						
θ \ φ	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')	
0°	400					
10°	232					
20°	208					
30°	262					
40°	421					
50°	203					
60°	188					
70°	11					
80°	0					
90°	0					
100°	0					
110°	0					
120°	0					
130°	0					
140°	0					
150°	0					
160°	0					
170°	0					
180°	0					



器具直下からの各方向への指定照度が得られる距離 (m) (保守率、光束換算係数を含む)																
取付け高さ (m)	3.0	3.5	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	12.0	14.0	16.0	18.0	20.0	
照度 (lx) \ φ																
1	0°	5.3	5.6	5.7	5.7	5.9	6.5	6.9	7.3	2.7	1.6	0.8	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	6.1	6.7	7.3	7.8	7.9	8.1	8.3	8.9	9.4	9.8	10.5	2.4	1.6	0.4	-
	45°															
	90°															
	135°															
	180°															
0.25	0°	6.8	7.6	8.3	8.9	9.6	10.6	11.2	11.3	11.4	11.7	12.9	13.9	14.6	5.4	3.3
	45°															
	90°															
	135°															
	180°															

東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30204

保 守 率	0.79
光 束 換 算 係 数	1.00



光 源	平常時	×
	非常時	JB10.8V30W -MH × 1
光 束	定 格	710 lm
	非常時	539 lm

前 面
下面開放
反射面
アルミ鏡面仕上

備 考 高天井用

配置表 (保守率、光束換算係数を含む)







取 付 高 さ		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単 体 配 置	A1	4.3	4.4	4.5	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.5	5.6	5.6	5.6
	A'1	4.3	4.4	4.5	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.5	5.6	5.6	5.6
	B1	4.3	4.4	4.5	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.5	5.6	5.6	5.6
	B'1	4.3	4.4	4.5	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.5	5.6	5.6	5.6
直 線 配 置	A2	9.2	9.6	9.8	10.2	10.4	10.8	11.0	11.4	11.6	11.8	12.2	12.4	12.6	13.0	13.2	13.4
	B2	9.2	9.6	9.8	10.2	10.4	10.8	11.0	11.4	11.6	11.8	12.2	12.4	12.6	13.0	13.2	13.4
四 角 配 置	A4	7.3	7.5	7.8	8.1	8.3	8.6	8.8	9.1	9.3	9.5	9.8	10.0	10.2	10.4	10.6	10.8
	B4	7.3	7.5	7.8	8.1	8.3	8.6	8.8	9.1	9.3	9.5	9.8	10.0	10.2	10.4	10.6	10.8
壁からの 最大取付距離	A0	3.2	3.3	3.3	3.5	3.5	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	4.3
	A'0	3.2	3.3	3.3	3.5	3.5	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	4.3
	B0	3.2	3.3	3.3	3.5	3.5	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	4.3
	B'0	3.2	3.3	3.3	3.5	3.5	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	4.3

取 付 高 さ		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単 体 配 置	A1	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.9	6.2	6.5	6.7	6.9	7.1	7.3
	A'1	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.9	6.2	6.5	6.7	6.9	7.1	7.3
	B1	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.9	6.2	6.5	6.7	6.9	7.1	7.3
	B'1	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.9	6.2	6.5	6.7	6.9	7.1	7.3
直 線 配 置	A2	13.6	13.8	14.0	14.2	14.6	14.8	15.0	15.2	15.2	15.6	15.8	15.8	16.0	16.2	16.8	17.4
	B2	13.6	13.8	14.0	14.2	14.6	14.8	15.0	15.2	15.2	15.6	15.8	15.8	16.0	16.2	16.8	17.4
四 角 配 置	A4	11.1	11.3	11.5	11.6	11.8	12.0	12.2	12.4	12.6	13.4	14.2	15.0	15.5	15.7	15.9	16.0
	B4	11.1	11.3	11.5	11.6	11.8	12.0	12.2	12.4	12.6	13.4	14.2	15.0	15.5	15.7	15.9	16.0
壁からの 最大取付距離	A0	4.3	4.4	4.4	4.5	4.5	4.5	4.5	4.5	4.5	4.3	3.8	3.1	2.4	2.5	3.3	4.0
	A'0	4.3	4.4	4.4	4.5	4.5	4.5	4.5	4.5	4.5	4.3	3.8	3.1	2.4	2.5	3.3	4.0
	B0	4.3	4.4	4.4	4.5	4.5	4.5	4.5	4.5	4.5	4.3	3.8	3.1	2.4	2.5	3.3	4.0
	B'0	4.3	4.4	4.4	4.5	4.5	4.5	4.5	4.5	4.5	4.3	3.8	3.1	2.4	2.5	3.3	4.0

取 付 高 さ		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単 体 配 置	A1	7.4	2.7	2.1	1.6	1.5	1.3	1.0	－	－	－	－	－	－	－	－	－
	A'1	7.4	2.7	2.1	1.6	1.5	1.3	1.0	－	－	－	－	－	－	－	－	－
	B1	7.4	2.7	2.1	1.6	1.5	1.3	1.0	－	－	－	－	－	－	－	－	－
	B'1	7.4	2.7	2.1	1.6	1.5	1.3	1.0	－	－	－	－	－	－	－	－	－
直 線 配 置	A2	18.0	18.6	19.0	19.4	19.8	20.2	20.6	20.8	7.8	6.6	5.2	4.2	3.8	3.4	3.0	2.4
	B2	18.0	18.6	19.0	19.4	19.8	20.2	20.6	20.8	7.8	6.6	5.2	4.2	3.8	3.4	3.0	2.4
四 角 配 置	A4	16.1	16.1	16.1	16.5	17.0	17.4	17.8	18.2	7.8	6.6	5.2	4.2	3.8	3.4	3.0	2.4
	B4	16.1	16.1	16.1	16.5	17.0	17.4	17.8	18.2	7.8	6.6	5.2	4.2	3.8	3.4	3.0	2.4
壁からの 最大取付距離	A0	4.5	3.6	2.8	2.1	0.2	0.2	0.2	0.2	5.6	6.6	7.7	8.3	8.6	8.9	9.2	9.6
	A'0	4.5	3.6	2.8	2.1	0.2	0.2	0.2	0.2	5.6	6.6	7.7	8.3	8.6	8.9	9.2	9.6
	B0	4.5	3.6	2.8	2.1	0.2	0.2	0.2	0.2	5.6	6.6	7.7	8.3	8.6	8.9	9.2	9.6
	B'0	4.5	3.6	2.8	2.1	0.2	0.2	0.2	0.2	5.6	6.6	7.7	8.3	8.6	8.9	9.2	9.6

東芝照明器具配光データシート

非常灯

名 称		非常用白熱灯専用形 (電池内蔵)		保守率					
形 名		IEM-30204		光束換算係数					
				1.00					
光源	平常時	×		前 面					
	非常時	JB10. 8V30W -MH × 1		下面開放					
光束	定 格	710 lm		反射面					
	非常時	539 lm		アルミ鏡面仕上					
						備考		高天井用	

器具直下からの各方面への指定照度が得られる距離(m) (保守率、光束換算係数を含む)

取付け高さ (m)	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
1	0°	4.3	4.4	4.5	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.6	5.6
	45°															
	90°															
	135°															
	180°															
0.5	0°	4.8	4.9	5.1	5.2	5.4	5.6	5.7	5.8	6.0	6.1	6.2	6.4	6.5	6.6	6.7
	45°															
	90°															
	135°															
	180°															
0.25	0°	5.2	5.4	5.6	5.8	5.9	6.1	6.3	6.5	6.6	6.8	7.0	7.1	7.3	7.4	7.6
	45°															
	90°															
	135°															
	180°															

取付け高さ (m)	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
1	0°	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.9	6.2	6.5	6.7	6.9	7.1	7.3
	45°															
	90°															
	135°															
	180°															
0.5	0°	7.0	7.1	7.2	7.3	7.4	7.5	7.6	7.7	7.8	7.9	8.0	8.1	8.1	8.3	8.6
	45°															
	90°															
	135°															
	180°															
0.25	0°	7.9	8.0	8.1	8.3	8.4	8.6	8.7	8.8	8.9	9.6	10.1	10.6	11.0	11.2	11.3
	45°															
	90°															
	135°															
	180°															

取付け高さ (m)	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
1	0°	7.4	2.7	2.1	1.6	1.5	1.3	1.0	0.8	0.4	0.1	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	9.1	9.4	9.6	9.8	10.0	10.2	10.4	10.5	4.1	3.5	2.8	2.4	2.2	2.0	1.8
	45°															
	90°															
	135°															
	180°															
0.25	0°	11.4	11.4	11.4	11.7	12.0	12.3	12.6	12.9	13.2	13.4	13.6	13.9	14.1	14.2	14.4
	45°															
	90°															
	135°															
	180°															