


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13000K

保守率	良	0.73
	中	0.69
	否	0.65


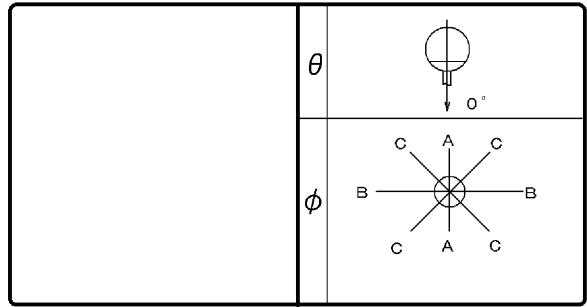


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F $\frac{1}{2}$	44.6 %
	F $\frac{3}{4}$	48.3 %
	F \bigcirc	93.0 %
	器具光束	3905 lm

備考

前面	グローブ (透明)
反射面	

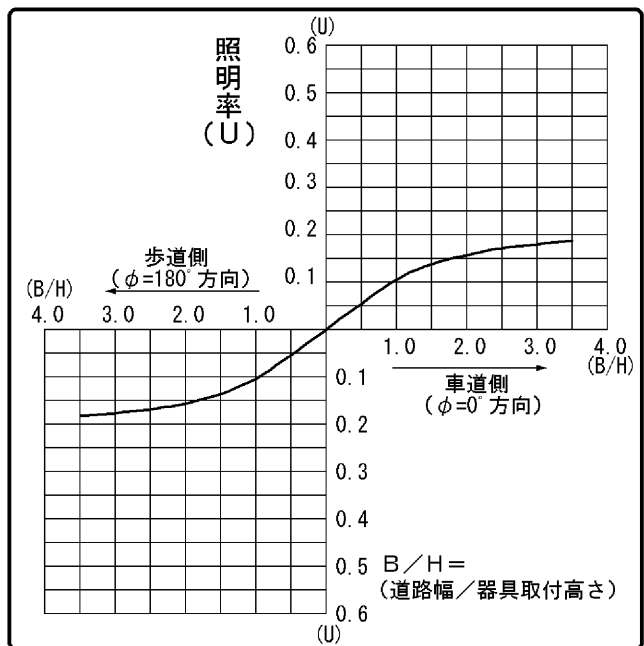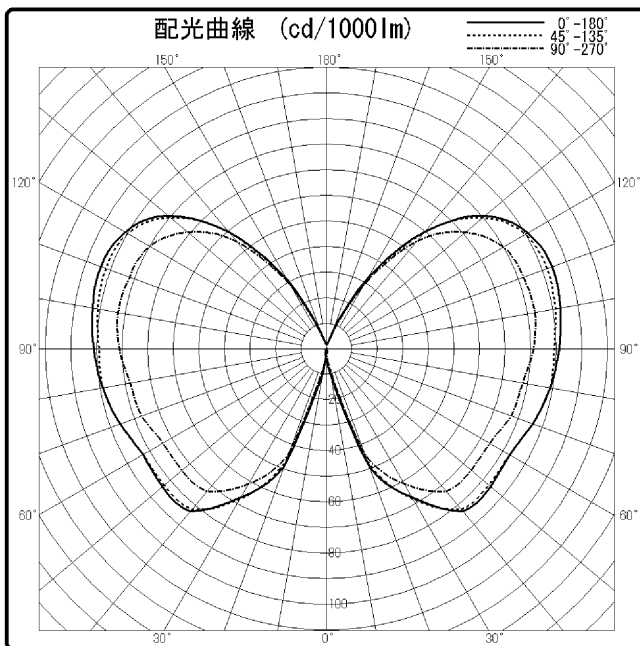

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	0	0	0	0	0
10°	10	7	9	7	10
20°	49	47	44	47	49
30°	67	68	61	68	67
40°	83	82	73	82	83
50°	84	83	74	83	84
60°	83	83	74	83	83
70°	86	86	77	86	86
80°	89	89	78	89	89
90°	91	89	81	89	91
100°	93	91	83	91	93
110°	94	92	82	92	94
120°	91	90	80	90	91
130°	81	80	71	80	81
140°	60	60	55	60	60
150°	32	30	29	30	32
160°	7	6	6	6	7
170°	2	2	2	2	2
180°	2	2	2	2	2

