

東芝照明器具配光データシート


名 称	白熱灯器具
形 名	IBF-3351 (W)

光源	名 称	レフランプミゼット形 (屋内用)
	形 名	RF100V57WM
	光 束	560 lm × 1

前 面	
反射面	

保守率	良	0.84
	中	0.79
	否	0.70

効 率	F 	0 %
	F 	94 %
	F 	94 %
	器具 光束	525 lm

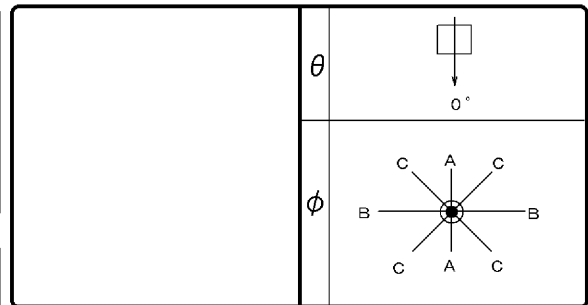

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備 考	
--------	--

光度 (cd/1000lm)		
0°	581	25°
1°		30°
2°		35°
3°		40°
4°		45°
5°		50°
6°		55°
7°		60°
8°		65°
9°		70°
10°	535	75°
11°		80°
12°		85°
13°		90°
14°		
15°		
16°		
17°		
18°		
19°		
20°	445	

反射率 (%)	天井	80						70						50				30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数		照 明 率 (×0.01)																			
0.60		63	58	51	48	43	42	62	57	50	48	43	42	49	47	42	41	42	41	37	36
0.80		74	67	62	58	54	51	72	66	61	57	53	51	59	56	52	51	51	50	46	45
1.00		83	74	71	66	63	59	80	73	69	65	62	59	67	64	61	58	59	58	54	52
1.25		89	79	78	71	70	66	86	78	76	71	69	65	73	69	67	64	66	64	60	58
1.50		94	83	84	76	76	71	91	81	82	75	75	70	79	74	73	69	71	68	65	63
2.00		101	88	92	82	85	78	98	86	90	81	83	77	86	79	80	76	78	75	72	70
2.50		105	90	97	86	91	82	101	89	95	85	89	81	90	83	85	80	82	79	76	74
3.00		108	92	101	88	95	85	104	91	98	87	93	84	93	85	89	83	85	81	79	77
4.00		111	95	106	92	101	89	107	93	103	91	98	88	97	89	93	86	89	85	83	81
5.00		114	96	109	93	105	91	110	95	105	92	102	90	99	90	96	89	92	87	85	83
10.00		118	99	116	97	113	96	114	98	112	96	110	95	104	94	103	93	97	92	90	88

