


# 東芝照明器具配光データシート

名称	昇降装置内蔵ダウンライト
形名	DDU-256M

保守率	良	0.65
	中	0.61
	否	0.54

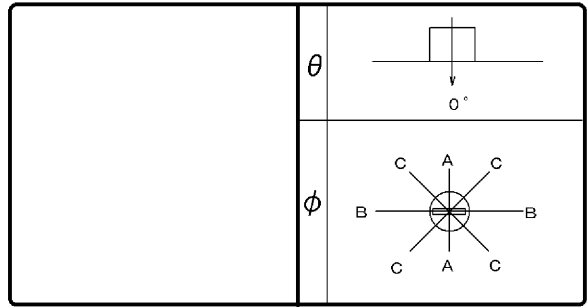

光源	名称	HQIランプ
	形名	HQI-TS250W/ NDL, UVS
	光束	20000 lm x 1

効率	F	0%
	F	50%
	F	50%
	器具光束	10035 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

前面	カバー (フロスト)
反射面	電解研磨梨地仕上げ

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	280		
10°	276		
20°	263		
30°	222		
40°	160		
50°	93		
60°	30		
70°	2		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	0				
室指数	照明率 (x0.01)																			
0.60	35	32	28	27	24	24	34	32	28	27	24	24	27	26	24	23	24	23	21	20
0.80	41	37	34	32	30	29	40	36	34	32	30	29	33	31	29	29	29	28	26	26
1.00	45	41	39	37	35	34	44	40	39	36	35	33	37	36	34	33	34	33	31	30
1.25	49	43	43	40	39	37	47	43	43	39	39	37	41	39	38	36	37	36	34	33
1.50	51	45	46	42	43	40	50	45	45	42	42	39	44	41	41	39	40	38	37	36
2.00	55	48	51	45	47	43	53	47	49	45	46	43	47	44	45	42	43	42	40	39
2.50	57	49	53	47	50	45	55	48	52	46	49	45	49	46	47	44	45	43	42	41
3.00	58	50	55	48	52	47	56	49	53	48	51	46	51	47	49	45	47	45	44	43
4.00	60	51	57	50	55	48	58	50	56	49	54	48	53	48	51	47	49	46	45	44
5.00	61	52	59	50	57	49	59	51	57	50	55	49	54	49	52	48	50	47	46	45
10.00	63	53	62	52	61	52	61	52	60	52	59	51	56	51	55	50	52	49	48	47

