


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FR-42731 (V)

保守率	良	0.70
	中	0.66
	否	0.61

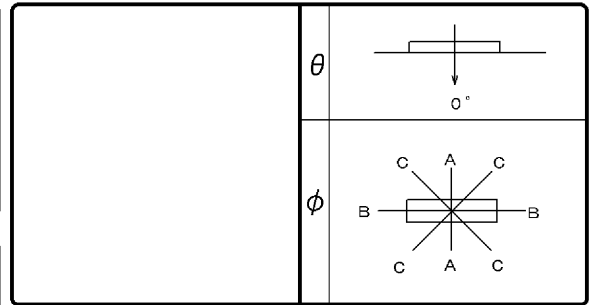

光源	名 称	蛍光ランプ
	形 名	FLR40S・EX-N /M/36-H
	光 束	3450 lm × 2

効 率	F	0 %
	F	63 %
	F	63 %
	器具 光束	4355 lm

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	ルーバー（銀色）
反射面	塗装（白）

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	277	277	277
10°	281	272	277
20°	284	256	270
30°	271	233	259
40°	200	202	222
50°	78	161	140
60°	34	103	45
70°	9	25	12
80°	3	4	4
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		44	40	36	34	31	30	43	40	35	34	31	30	34	33	30	29	30	29	27	26		
0.80		52	47	44	42	39	38	51	47	44	41	39	37	42	40	38	37	38	37	34	33		
1.00		57	51	49	45	44	42	55	50	48	45	43	41	47	44	42	41	42	41	38	37		
1.25		61	54	54	50	49	46	59	53	53	49	48	46	51	48	47	45	46	45	42	41		
1.50		64	56	58	52	53	49	62	56	56	52	52	49	54	51	50	48	49	47	45	44		
2.00		69	60	63	56	59	54	67	59	62	56	58	53	59	55	56	53	54	52	50	49		
2.50		71	61	66	59	62	56	69	61	65	58	61	56	62	57	59	55	56	54	52	51		
3.00		73	63	69	60	65	58	71	62	67	60	64	58	63	58	61	57	58	56	54	53		
4.00		75	64	72	62	69	61	73	63	70	62	67	60	66	60	64	59	61	58	57	55		
5.00		77	65	74	63	71	62	74	64	71	63	69	61	67	61	66	60	62	59	58	57		
10.00		79	66	78	66	76	65	77	66	75	65	74	64	70	63	69	63	65	62	61	59		

