

# 東芝照明器具配光データシート


## 階段通路誘導灯

名称	非常用蛍光灯併用形 (電池内蔵)
形名	FTC-31804


保守率	0.66
光束換算係数	1.00

光源	平常時	FCL30W/28 × 1
	非常時	FCL30W/28 × 1
光束	定格	lm
	非常時	668 lm

前面	グローブ (フロスト)
反射面	塗装 (白)

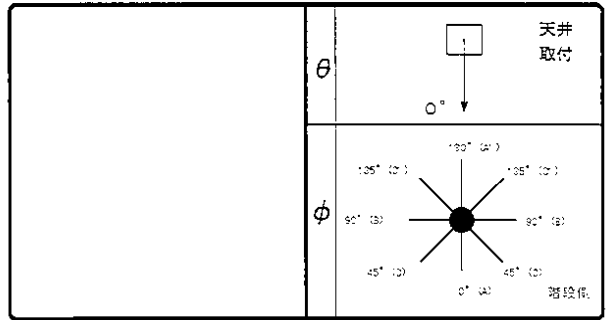


備考	
----	--

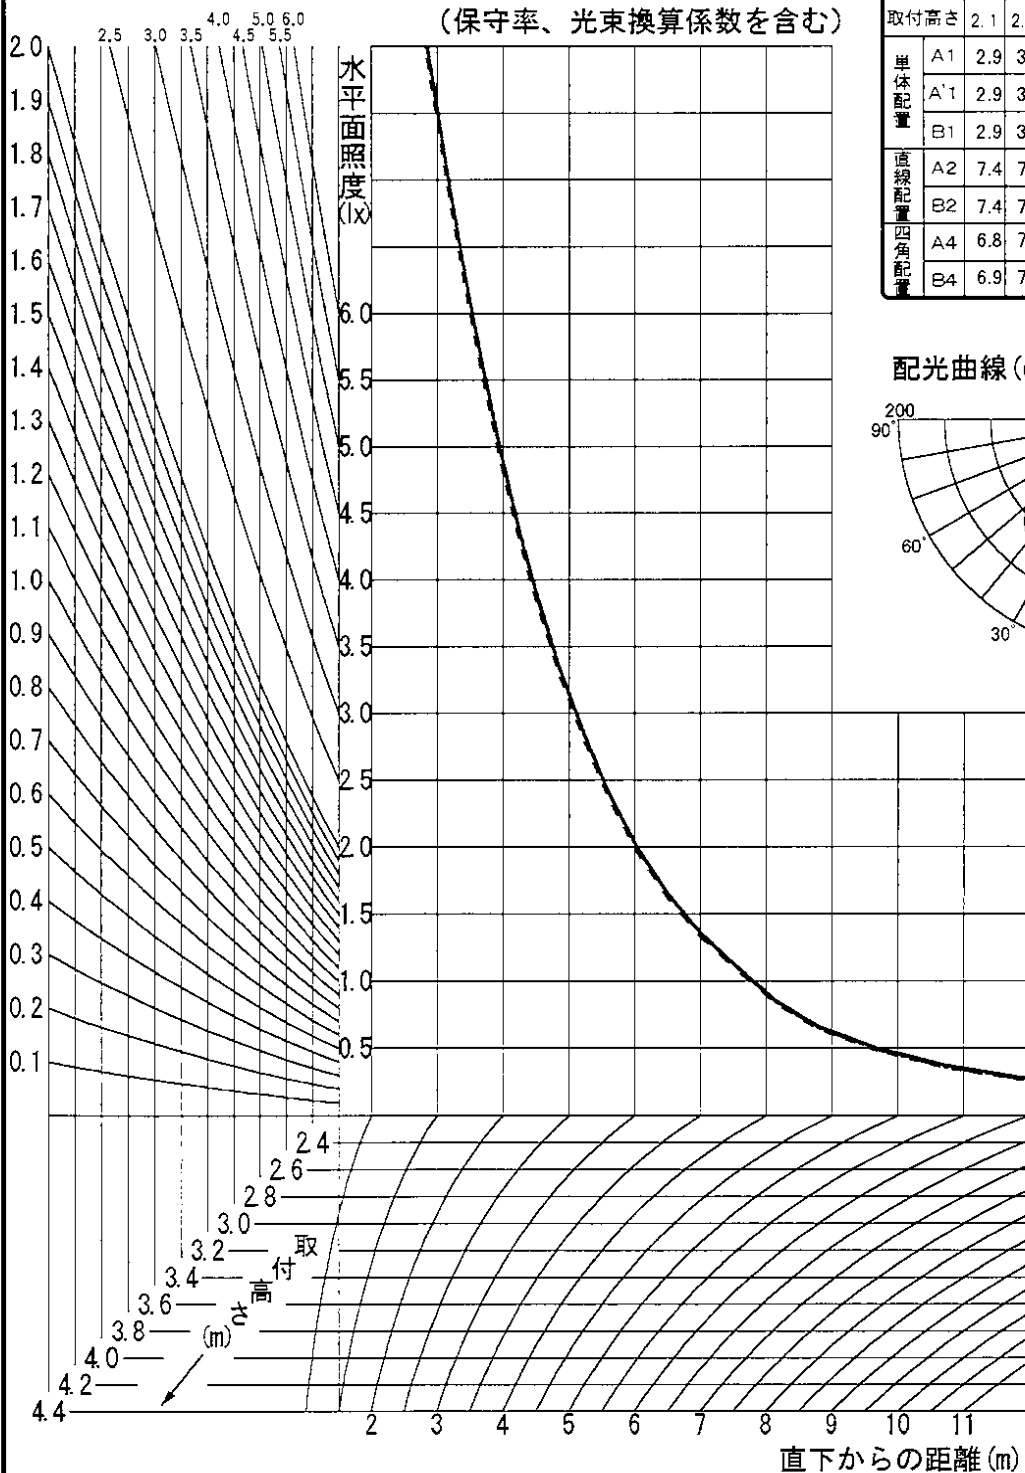


配置表 (保守率、光束換算係数を含む)

取付高さ	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0	
単体配置	A1	2.9	3.1	3.2	3.2	3.1	3.0	2.8	2.5	1.1	-
	A'1	2.9	3.1	3.2	3.2	3.1	3.0	2.8	2.5	1.1	-
	B1	2.9	3.0	3.0	3.2	3.1	3.0	2.8	2.5	1.1	-
直線配置 四角配置	A2	7.4	7.6	7.8	8.2	8.4	8.6	8.6	8.4	8.0	-
	B2	7.4	7.6	7.8	8.2	8.4	8.6	8.6	8.4	7.8	-
	A4	6.8	7.1	7.3	7.7	8.0	8.3	8.5	8.4	8.0	-
	B4	6.9	7.2	7.4	7.7	8.1	8.4	8.6	8.4	7.8	-

配光曲線 (cd/1000lm)

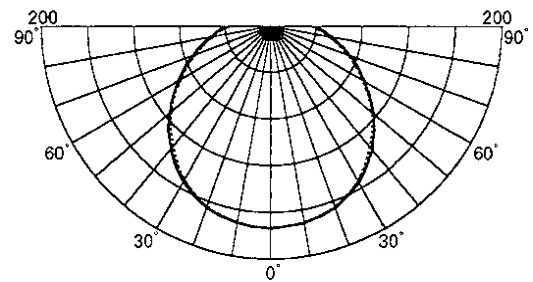

—————  $\phi = 0^\circ$   
 - - - - -  $45^\circ$   
 - · - · -  $90^\circ$

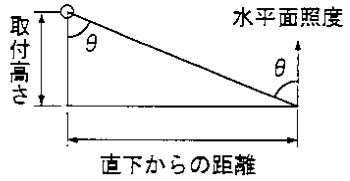


# 東芝照明器具配光データシート

## 階段通路誘導灯

名称	非常用蛍光灯併用形 (電池内蔵)
形名	FTC-31804

保守率	0.66
光束換算係数	1.00

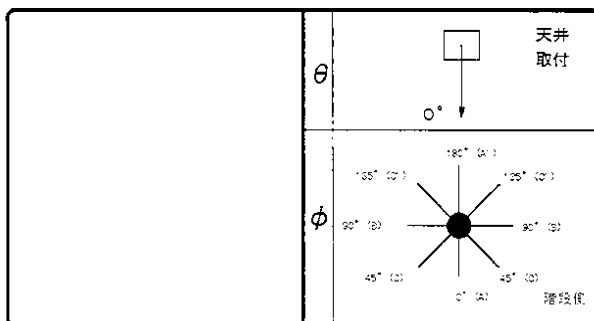

光源	平常時	FCL30W/28	× 1
	非常時	FCL30W/28	× 1
光束	定格		lm
	非常時	668	lm

前面	グローブ (フロスト)
反射面	塗装 (白)

備考	
----	--

$\theta \backslash \phi$	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')
0°	173	173	173		
10°	171	171	171		
20°	165	165	164		
30°	154	153	152		
40°	137	137	135		
50°	117	117	115		
60°	95	94	93		
70°	73	72	71		
80°	54	52	52		
90°	40	38	38		
100°	32	29	30		
110°	26	23	22		
120°	19	17	13		
130°	0	0	0		
140°	0	0	0		
150°	0	0	0		
160°	0	0	0		
170°	0	0	0		
180°	0	0	0		

取り付け高さ(m)			1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
階段幅 (1/2)	1.0m	2lx X	2.3	2.7	2.8	3.0	3.0	3.0	3.0	2.7	2.3
		1lx x	2.8	3.3	3.8	4.0	4.1	4.4	4.4	4.4	4.4
	1.5m	2lx X	1.9	2.3	2.7	2.8	2.8	2.8	2.7	2.5	2.0
		1lx x	2.7	3.2	3.5	3.8	4.0	4.1	4.3	4.3	4.1
	2.0m	2lx X	1.4	1.9	2.3	2.5	2.5	2.5	2.3	1.9	1.4
		1lx x	2.3	2.8	3.3	3.5	3.8	4.0	4.0	4.0	4.0
	2.5m	2lx X	—	1.2	1.7	1.9	1.9	1.9	1.8	1.3	—
		1lx x	1.7	2.3	3.0	3.3	3.5	3.7	3.8	3.8	3.7
	3.0m	2lx X	—	—	—	—	—	—	—	—	—
		1lx x	—	1.7	2.3	2.8	3.0	3.3	3.3	3.3	3.3