



東芝照明器具配光データシート

階段通路誘導灯

名称	非常用蛍光灯併用形 (電池内蔵)
形名	FES-1810N (V)


保守率	0.70
光束換算係数	1.00



光源	平常時	FDL18EX-L x 1
	非常時	FDL18EX-L x 1
光束	定格	lm
	非常時	589 lm


前面	下面開放
反射面	銀色鏡面仕上

備考

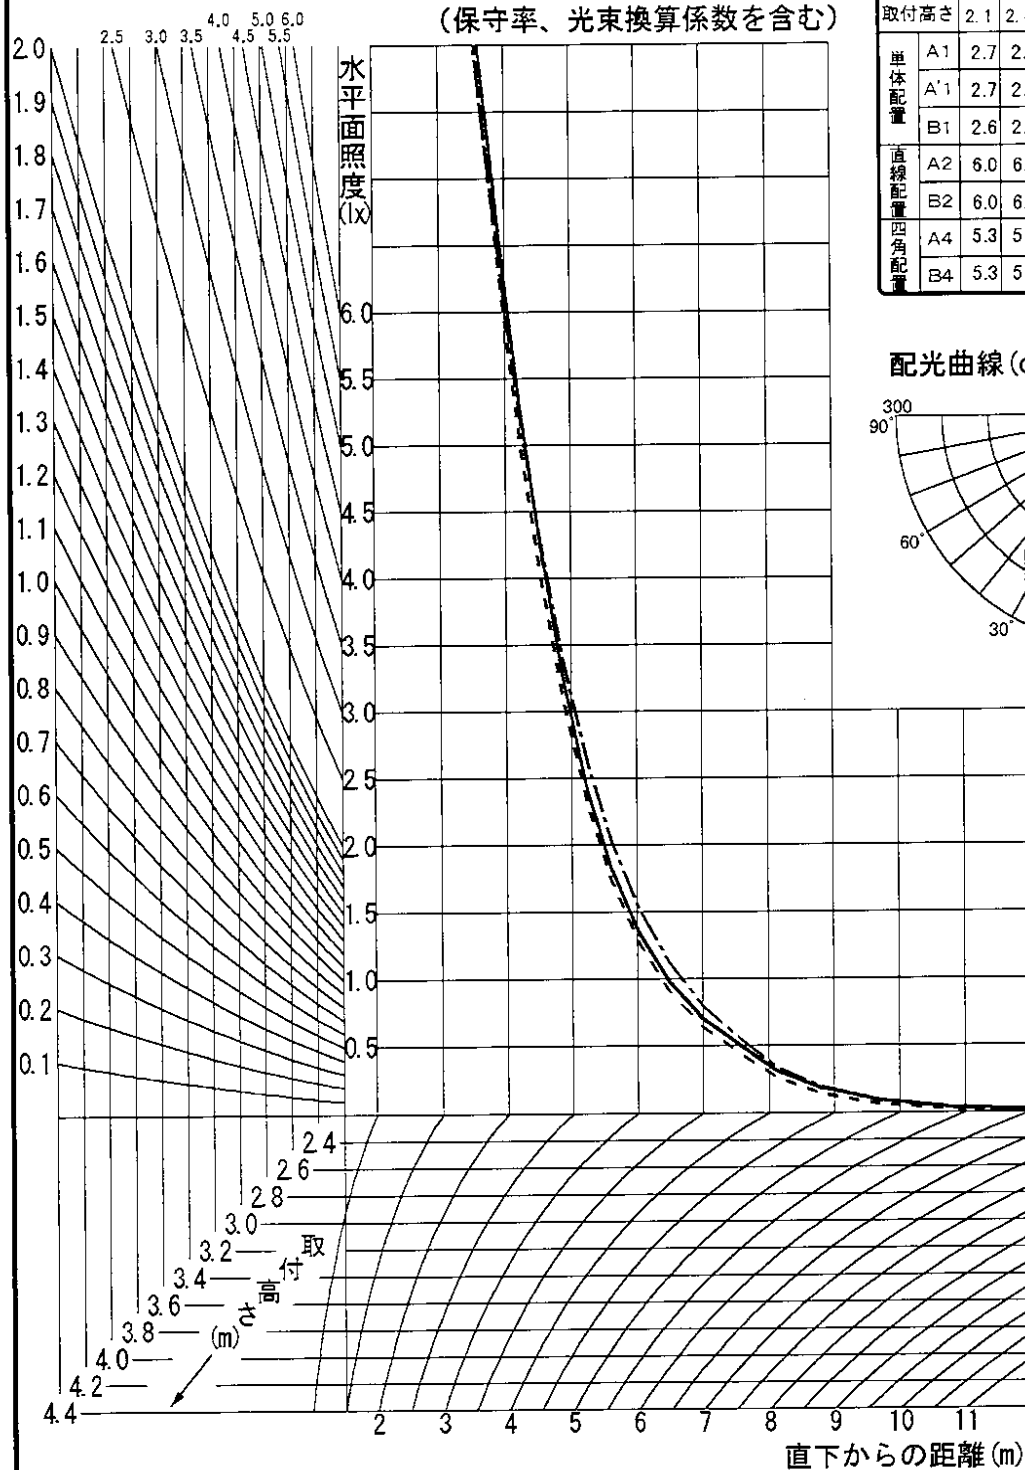


配置表 (保守率、光束換算係数を含む)

取付高さ	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0	
単体配置	A1	2.7	2.9	2.9	3.2	3.4	3.5	3.6	3.6	3.3	2.6
	A'1	2.7	2.9	2.9	3.2	3.4	3.5	3.6	3.6	3.3	2.6
直線配置	B1	2.6	2.8	2.9	3.2	3.3	3.5	3.6	3.6	3.4	2.5
	B2	6.0	6.6	6.8	7.4	8.0	8.6	9.0	9.4	9.8	9.8
四角配置	A4	5.3	5.8	6.0	6.5	7.2	7.7	8.1	8.5	9.2	9.6
	B4	5.3	5.7	6.0	6.6	7.1	7.6	8.0	8.4	9.0	9.5

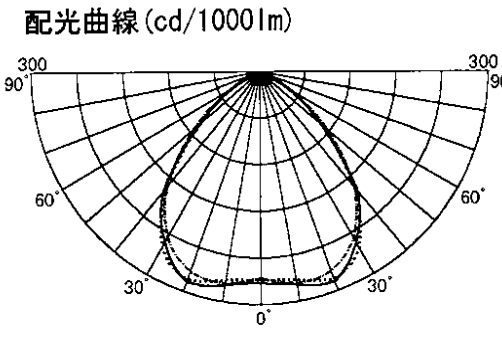

$\phi = 0^\circ$
 45°
 90°





東芝照明器具配光データシート

階段通路誘導灯

名称	非常用蛍光灯併用形 (電池内蔵)
形名	FES-1810N (V)

保守率	0.70
光束換算係数	1.00



光源	平常時	FDL18EX-L × 1
	非常時	FDL18EX-L × 1
光束	定格	lm
	非常時	589 lm

前面	下面開放
反射面	銀色鏡面仕上

備考

$\theta \backslash \phi$	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')
0°	272	266	269		
10°	278	276	271		
20°	287	272	283		
30°	253	246	261		
40°	199	191	191		
50°	107	116	102		
60°	46	50	40		
70°	6	4	3		
80°	1	1	1		
90°	1	1	1		
100°	0	0	0		
110°	0	0	0		
120°	0	0	0		
130°	0	0	0		
140°	0	0	0		
150°	0	0	0		
160°	0	0	0		
170°	0	0	0		
180°	0	0	0		

取り付け高さ(m)			1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
階段幅 (1/2)	1.0m	21x X	1.6	2.2	2.5	2.8	3.2	3.3	3.5	3.5	3.5
		11x x	1.9	2.5	3.0	3.5	3.8	4.1	4.4	4.6	4.8
	1.5m	21x X	1.1	1.9	2.3	2.7	3.0	3.2	3.3	3.3	3.3
		11x x	1.6	2.3	2.8	3.3	3.7	4.0	4.3	4.5	4.6
	2.0m	21x X	—	1.2	1.9	2.3	2.5	2.8	3.0	3.0	3.0
		11x x	—	1.9	2.5	3.0	3.5	3.8	4.0	4.3	4.5
	2.5m	21x X	—	—	—	1.7	2.0	2.3	2.5	2.5	2.5
		11x x	—	—	2.0	2.7	3.2	3.5	3.8	4.0	4.1
	3.0m	21x X	—	—	—	—	1.1	1.6	1.9	1.9	1.9
		11x x	—	—	—	1.9	2.5	3.0	3.3	3.7	3.8