


東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-20801

保 守 率	0.79
光 束 換 算 係 数	1.00

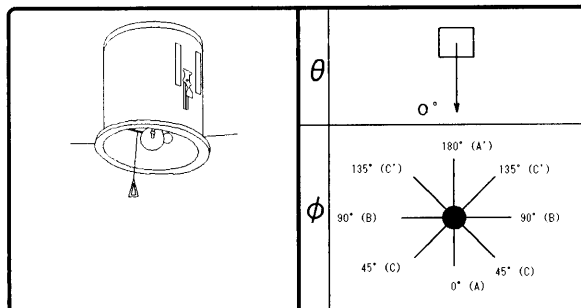

光源	平常時	x
	非常時	PIL7. 2V20W S35E17 x 1
光束	定 格	335 lm
	非常時	254 lm




前 面
下面開放
反射面
アルミ蒸着処理

備 考	
-----	--

配置表 (保守率、光束換算係数を含む)

取付高さ	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0
単 体 配 置	A1	4.4	4.8	5.0	5.4	5.1	3.0	2.6	1.3	-
	A'1	4.4	4.8	5.0	5.4	5.1	3.0	2.6	1.3	-
	B1	4.4	4.8	5.0	5.4	5.1	3.0	2.6	1.3	-
	B'1	4.4	4.8	5.0	5.4	5.1	3.0	2.6	1.3	-
直 線 配 置	A2	9.6	10.6	11.2	12.2	13.4	14.4	15.4	13.8	7.6
	B2	9.6	10.6	11.2	12.2	13.4	14.4	15.4	13.8	7.6
四 角 配 置	A4	7.7	8.5	9.0	9.9	11.0	12.0	12.9	13.7	7.6
	B4	7.7	8.5	9.0	9.9	11.0	12.0	12.9	13.7	7.6
壁からの最大取付距離	A0	3.2	3.5	3.6	3.9	4.2	2.5	0.2	0.2	3.6
	A'O	3.2	3.5	3.6	3.9	4.2	2.5	0.2	0.2	3.6
	B0	3.2	3.5	3.6	3.9	4.2	2.5	0.2	0.2	3.6
	B'O	3.2	3.5	3.6	3.9	4.2	2.5	0.2	0.2	3.6

配光曲線 (cd/1000lm)

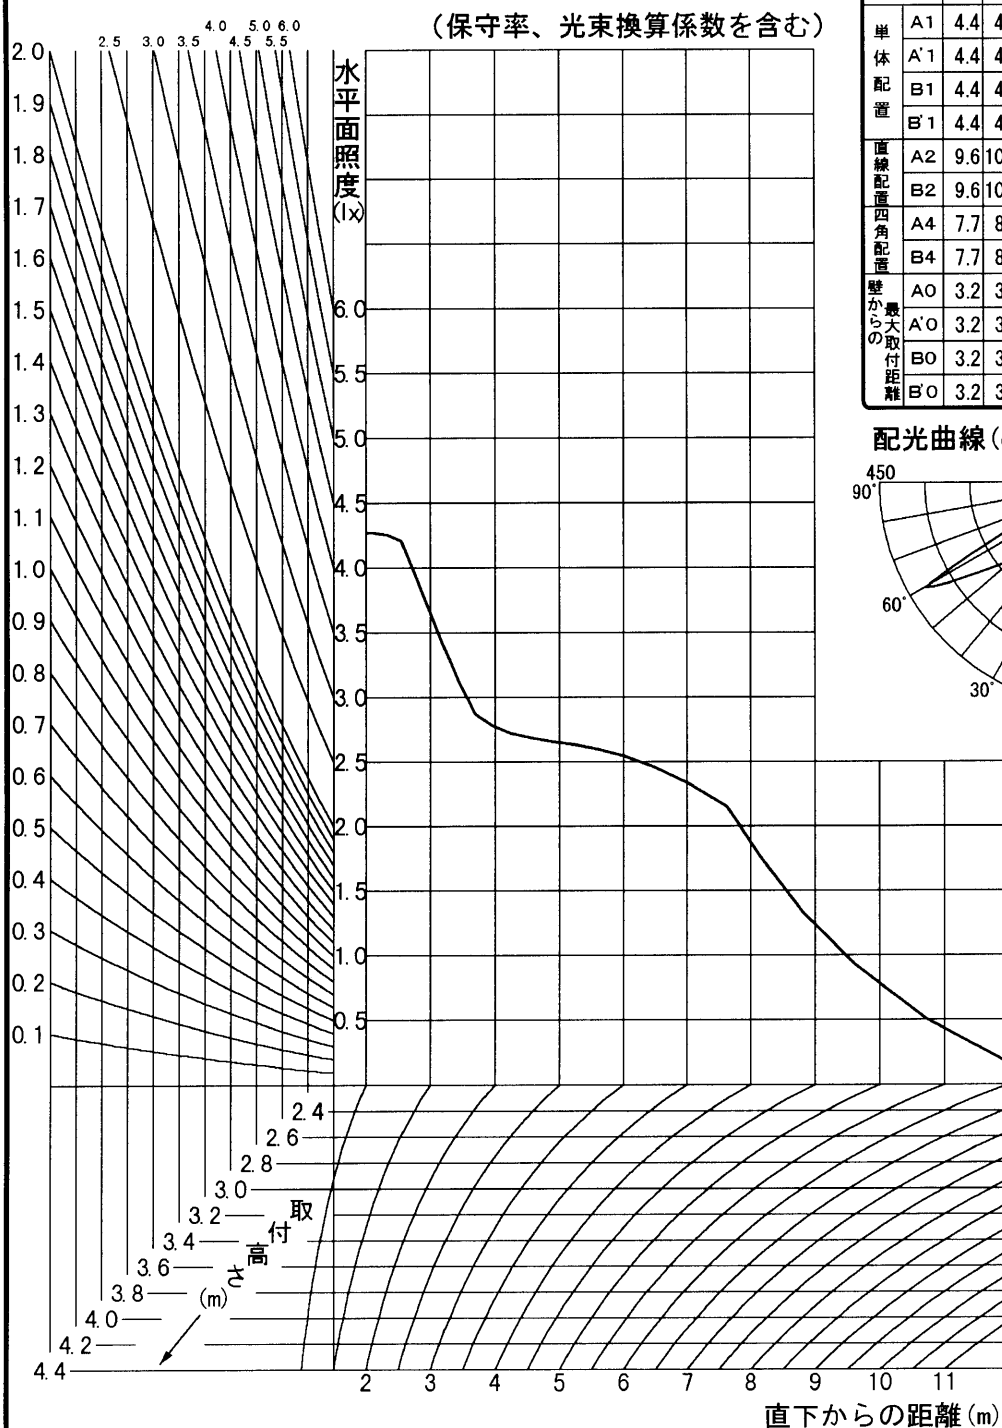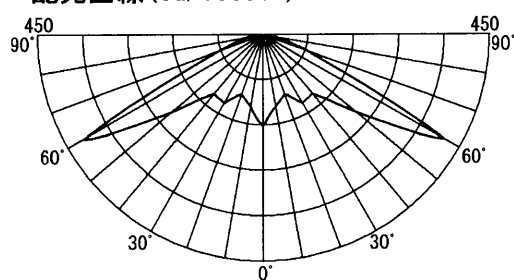


東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-20801

保 守 率	0.79
光 束 換 算 係 数	1.00

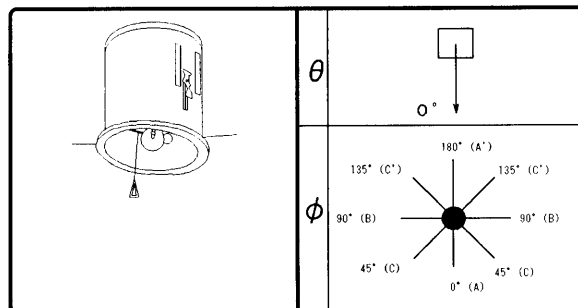

光源	平常時	×
	非常時	PIL7. 2V20W S35E17 × 1
光束	定 格	335 lm
	非常時	254 lm

前 面
下面開放
反射面
アルミ蒸着処理



備 考	
-----	--

		光度 (cd/1000lm)				
θ \ φ		0° (A)	45° (C)	90° (B)	135° (C')	180° (A')
0°	0°	182				
10°	0°	146				
20°	0°	126				
30°	0°	156				
40°	0°	154				
50°	0°	239				
60°	0°	415				
70°	0°	90				
80°	0°	1				
90°	0°	0				
100°	0°	0				
110°	0°	0				
120°	0°	0				
130°	0°	0				
140°	0°	0				
150°	0°	0				
160°	0°	0				
170°	0°	0				
180°	0°	0				

		器具直下からの各方向への指定照度が得られる距離 (m) (保守率、光束換算係数を含む)														
照度 (lx)	取付け高さ (m)	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0	8.0	10.0	12.0	14.0	16.0
1	0°	4.4	4.8	5.0	5.4	5.1	3.0	2.6	1.3	0.1	-	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	5.0	5.4	5.7	6.3	6.8	7.4	7.9	7.1	4.0	1.9	0.8	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.25	0°	5.5	6.1	6.4	7.1	7.8	8.5	9.1	9.7	10.8	10.2	6.0	2.6	0.2	-	-
	45°															
	90°															
	135°															
	180°															

東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)	保 守 率	0.79		
形 名	IEM-20801	光 束 換 算 係 数	1.00		
光源	平常時	×		備 考	
	非常時	PIL7, 2V20W S35E17	×		
光束	定 格	335 lm		備 考	
	非常時	254 lm			

配置表 (保守率、光束換算係数を含む)

取 付 高 さ		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単 体 配 置	A1	4.4	4.5	4.6	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.5	5.4	5.1	4.2
	A'1	4.4	4.5	4.6	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.5	5.4	5.1	4.2
	B1	4.4	4.5	4.6	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.5	5.4	5.1	4.2
	B'1	4.4	4.5	4.6	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.5	5.4	5.1	4.2
直 線 配 置	A2	9.6	10.0	10.2	10.6	10.8	11.2	11.4	11.6	12.0	12.2	12.4	12.8	13.0	13.2	13.4	13.6
	B2	9.6	10.0	10.2	10.6	10.8	11.2	11.4	11.6	12.0	12.2	12.4	12.8	13.0	13.2	13.4	13.6
四 角 配 置	A4	7.7	8.0	8.3	8.5	8.8	9.0	9.3	9.5	9.7	9.9	10.2	10.4	10.6	10.8	11.0	11.2
	B4	7.7	8.0	8.3	8.5	8.8	9.0	9.3	9.5	9.7	9.9	10.2	10.4	10.6	10.8	11.0	11.2
壁からの 最大取付距離	A0	3.2	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	3.9
	A'0	3.2	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	3.9
	B0	3.2	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	3.9
	B'0	3.2	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.9	4.0	4.0	4.1	4.1	4.2	3.9

取 付 高 さ		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単 体 配 置	A1	3.9	3.1	3.0	3.0	2.9	2.9	2.8	2.7	2.6	1.3	-	-	-	-	-	-
	A'1	3.9	3.1	3.0	3.0	2.9	2.9	2.8	2.7	2.6	1.3	-	-	-	-	-	-
	B1	3.9	3.1	3.0	3.0	2.9	2.9	2.8	2.7	2.6	1.3	-	-	-	-	-	-
	B'1	3.9	3.1	3.0	3.0	2.9	2.9	2.8	2.7	2.6	1.3	-	-	-	-	-	-
直 線 配 置	A2	13.8	14.0	14.2	14.4	14.8	15.0	15.0	15.2	15.4	13.8	8.2	7.6	4.2	3.2	1.6	-
	B2	13.8	14.0	14.2	14.4	14.8	15.0	15.0	15.2	15.4	13.8	8.2	7.6	4.2	3.2	1.6	-
四 角 配 置	A4	11.4	11.6	11.8	12.0	12.2	12.3	12.5	12.7	12.9	13.7	8.2	7.6	4.2	3.2	1.6	-
	B4	11.4	11.6	11.8	12.0	12.2	12.3	12.5	12.7	12.9	13.7	8.2	7.6	4.2	3.2	1.6	-
壁からの 最大取付距離	A0	3.5	2.9	2.8	2.5	2.0	1.6	1.0	0.2	0.2	0.2	3.2	3.6	5.5	6.0	4.9	-
	A'0	3.5	2.9	2.8	2.5	2.0	1.6	1.0	0.2	0.2	0.2	3.2	3.6	5.5	6.0	4.9	-
	B0	3.5	2.9	2.8	2.5	2.0	1.6	1.0	0.2	0.2	0.2	3.2	3.6	5.5	6.0	4.9	-
	B'0	3.5	2.9	2.8	2.5	2.0	1.6	1.0	0.2	0.2	0.2	3.2	3.6	5.5	6.0	4.9	-



取 付 高 さ		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単 体 配 置	A1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	A'1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B'1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
直 線 配 置	A2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
四 角 配 置	A4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
壁からの 最大取付距離	A0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	A'0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B'0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-20801

保 守 率	0.79
光 束 換 算 係 数	1.00



光源	平常時	x
	非常時	PIL7. 2V20W S35E17 x 1
光束	定 格	335 lm
	非常時	254 lm

前 面
下面開放
反射面
アルミ蒸着処理

備 考	
-----	--

器具直下からの各方面への指定照度が得られる距離 (m) (保守率、光束換算係数を含む)

取付け高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
照度 (lx)	φ																
1	0°	4.4	4.5	4.6	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.5	5.4	5.1	4.2
	45°																
	90°																
	135°																
	180°																
0.5	0°	5.0	5.1	5.3	5.4	5.6	5.7	5.9	6.0	6.1	6.3	6.4	6.5	6.6	6.7	6.8	6.9
	45°																
	90°																
	135°																
	180°																
0.25	0°	5.5	5.7	5.9	6.1	6.3	6.4	6.6	6.8	6.9	7.1	7.2	7.4	7.6	7.7	7.8	8.0
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
照度 (lx)	φ																
1	0°	3.9	3.1	3.0	3.0	2.9	2.9	2.8	2.7	2.6	1.3	0.7	0.1	—	—	—	—
	45°																
	90°																
	135°																
	180°																
0.5	0°	7.1	7.2	7.3	7.4	7.5	7.6	7.7	7.8	7.9	7.1	4.3	4.0	2.4	1.9	1.3	0.8
	45°																
	90°																
	135°																
	180°																
0.25	0°	8.1	8.3	8.4	8.5	8.7	8.8	8.9	9.0	9.1	9.7	10.3	10.8	11.2	10.2	6.2	6.0
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
照度 (lx)																
1	0°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	0.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.25	0°	5.6	5.3	3.1	2.6	2.0	1.5	0.9	0.2	-	-	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															