



# 東芝照明器具配光データシート

|    |         |
|----|---------|
| 名称 | キャブロード  |
| 形名 | HW-1041 |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.77 |
|     | 中 | 0.73 |
|     | 否 | 0.69 |





|    |    |             |
|----|----|-------------|
| 光源 | 名称 | 蛍光水銀ランプ     |
|    | 形名 | HF100X      |
|    | 光束 | 4200 lm × 1 |

|    |                 |         |
|----|-----------------|---------|
| 効率 | F $\frac{1}{2}$ | 0.7 %   |
|    | F $\frac{3}{4}$ | 37.4 %  |
|    | F $\bigcirc$    | 38.1 %  |
|    | 器具光束            | 1602 lm |

備考

|     |            |
|-----|------------|
| 前面  | カバー (フロスト) |
| 反射面 |            |

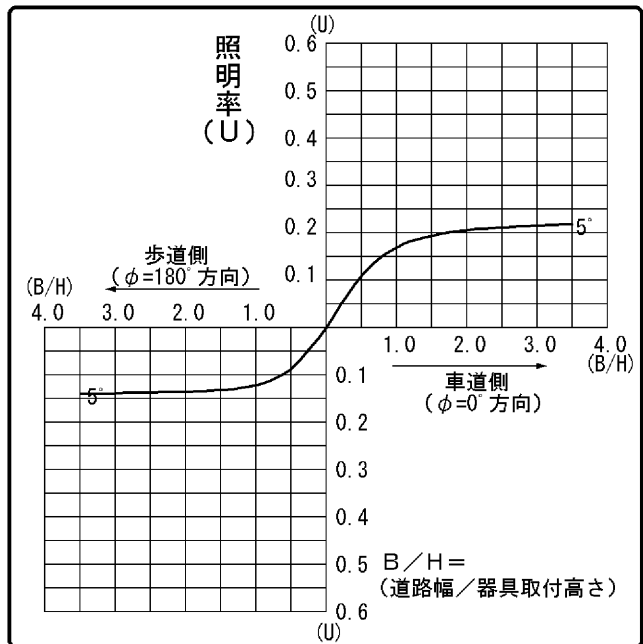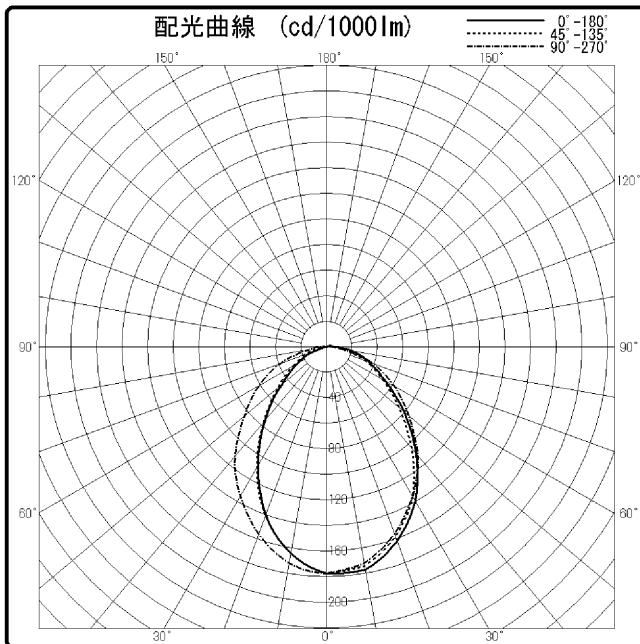

| $\theta \setminus \phi$ | 0°  | 45° | 90° | 135° | 180° |
|-------------------------|-----|-----|-----|------|------|
| 0°                      | 177 | 177 | 177 | 177  | 177  |
| 10°                     | 177 | 174 | 172 | 164  | 164  |
| 20°                     | 162 | 158 | 156 | 141  | 140  |
| 30°                     | 139 | 135 | 135 | 109  | 107  |
| 40°                     | 109 | 104 | 112 | 77   | 75   |
| 50°                     | 79  | 75  | 84  | 50   | 46   |
| 60°                     | 53  | 50  | 61  | 31   | 25   |
| 70°                     | 36  | 32  | 38  | 19   | 12   |
| 80°                     | 21  | 15  | 15  | 8    | 3    |
| 90°                     | 6   | 4   | 4   | 2    | 0    |
| 100°                    | 3   | 3   | 3   | 2    | 0    |
| 110°                    | 3   | 2   | 3   | 1    | 0    |
| 120°                    | 1   | 1   | 2   | 1    | 0    |
| 130°                    | 0   | 0   | 0   | 0    | 0    |
| 140°                    | 0   | 0   | 0   | 0    | 0    |
| 150°                    | 0   | 0   | 0   | 0    | 0    |
| 160°                    | 0   | 0   | 0   | 0    | 0    |
| 170°                    | 0   | 0   | 0   | 0    | 0    |
| 180°                    | 0   | 0   | 0   | 0    | 0    |

