


東芝照明器具配光データシート

名称	噴水照明器具
形名	BNZ-2500+BN Z-F30GR

保守率	良	0.88
	中	0.84
	否	0.79

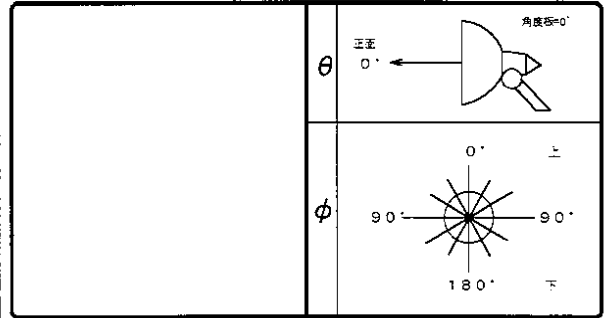

光源	名称	ネオハロゲンランプ
	形名	JD100/110V2 50W-E
	光束	4500 lm x 1

前面
カバー (緑)
反射面
電解研磨鏡面仕上

備考

		光度 (cd/1000lm)													
$\theta \backslash \phi$	ϕ	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°	
0°	0°	27													
10°	0°	18													
20°	0°	24													
30°	0°	26													
40°	0°	9													
50°	0°	5													
60°	0°	3													
70°	0°	1													
80°	0°	0													
90°	0°	0													
100°	0°	0													
110°	0°	0													
120°	0°	0													
130°	0°	0													
140°	0°	0													
150°	0°	0													
160°	0°	0													
170°	0°	0													
180°	0°	0													

