


東芝照明器具配光データシート

名称	サービスステーション 用照明器具
形名	HZ-4009N

保守率	良	0.83
	中	0.78
	否	0.74

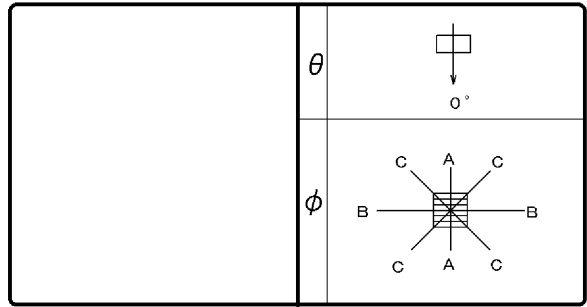

光源	名称	ネオルックス
	形名	NH400F
	光束	47800 lm × 1

前面
プリズムカバー
反射面
メタリックシルバー 塗装

備考

光度 (cd/1000lm)													
$\theta \setminus \phi$	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
0°	135			135			135						
10°	127			127			132						
20°	130			126			127						
30°	124			118			115						
40°	113			132			95						
50°	100			98			70						
60°	94			83			45						
70°	66			66			30						
80°	35			40			10						
90°	0			0			0						
100°	0			0			0						
110°	0			0			0						
120°	0			0			0						
130°	0			0			0						
140°	0			0			0						
150°	0			0			0						
160°	0			0			0						
170°	0			0			0						
180°	0			0			0						

