


東芝ランプ 配光データシート

名称	反射形チヨークレス水銀ランプ
形名	BHRF200-220 V250W/T
光束	4000 lm × 1

保守率	良	0.80
	中	0.77
	否	0.73

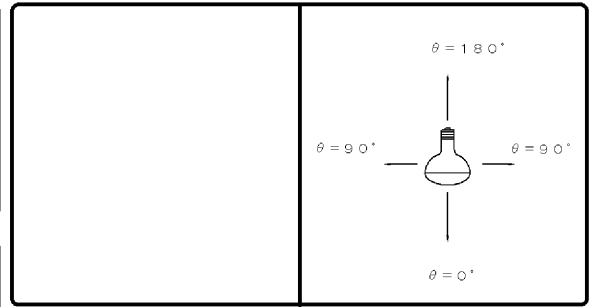

効率	F	%
	F	%
	F	100 %
	器具光束	4000 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	300		
10°	300		
20°	286		
30°	271		
40°	242		
50°	203		
60°	164		
70°	107		
80°	64		
90°	32		
100°	22		
110°	18		
120°	15		
130°	11		
140°	8		
150°	6		
160°	3		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																								
0.60	63	58	47	44	37	36	61	56	45	43	36	35	43	41	35	34	33	33	27	25					
0.80	75	68	58	55	48	46	72	66	57	53	47	45	53	51	45	43	43	42	36	33					
1.00	85	76	69	64	57	55	81	74	67	62	56	54	63	59	54	52	51	50	44	41					
1.25	93	83	78	71	66	62	89	80	75	69	65	61	70	66	62	59	59	57	51	48					
1.50	100	88	85	77	74	69	95	85	82	75	72	67	77	72	68	65	65	63	57	54					
2.00	109	95	96	86	85	78	104	92	92	84	83	77	86	80	78	74	74	71	66	62					
2.50	114	99	103	91	93	84	109	96	99	89	90	83	92	85	85	80	80	77	71	68					
3.00	119	102	108	95	99	89	113	99	104	93	96	87	96	89	90	84	84	81	76	72					
4.00	124	105	115	100	108	95	118	103	111	98	104	93	102	93	97	89	90	86	82	78					
5.00	127	108	120	103	113	99	121	105	115	101	109	97	106	96	101	93	94	90	85	82					
10.00	134	112	130	110	126	107	128	110	124	107	121	105	114	103	111	101	103	97	94	90					

