


# 東芝ランプ 配光データシート

名称	反射形蛍光水銀ランプ
形名	HRF100X/T
光束	3300 lm × 1

保守率	良	0.80
	中	0.77
	否	0.73

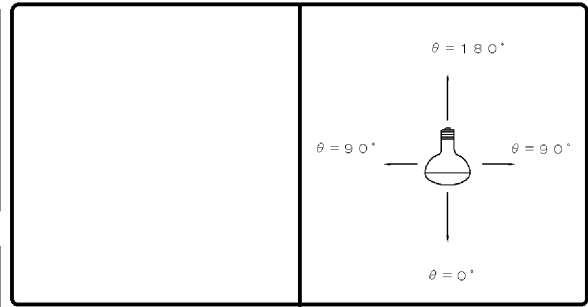

効率	F	%
	F	%
	F	100 %
	器具光束	3300 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		227	
10°		227	
20°		221	
30°		212	
40°		200	
50°		175	
60°		142	
70°		103	
80°		65	
90°		42	
100°		30	
110°		22	
120°		20	
130°		17	
140°		11	
150°		8	
160°		5	
170°		2	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	0	10	0		
室指数	照明率 (×0.01)																			
0.60	55	51	40	38	31	30	52	49	39	37	30	29	36	35	29	28	27	27	22	19
0.80	65	59	50	47	40	39	62	57	48	46	39	38	45	43	37	36	35	34	29	26
1.00	74	67	59	55	49	47	71	64	57	53	48	45	53	50	45	43	42	41	36	33
1.25	82	72	67	62	57	53	78	70	65	60	55	52	60	56	52	50	49	47	42	39
1.50	87	77	74	67	64	59	83	74	71	65	62	58	65	61	58	55	54	52	47	44
2.00	96	83	83	75	74	68	91	80	80	72	71	66	74	68	67	63	62	60	55	51
2.50	101	87	90	79	81	73	96	84	86	77	78	71	79	73	73	68	67	65	60	56
3.00	104	90	95	83	87	77	99	87	91	81	83	75	83	76	77	72	71	68	64	60
4.00	109	93	101	88	94	83	104	90	97	85	90	81	88	81	83	77	77	73	69	65
5.00	112	95	105	91	99	86	107	92	101	88	95	84	92	83	87	80	80	76	72	68
10.00	119	100	115	97	111	94	113	97	109	94	106	92	99	90	97	88	88	84	80	76

