


■ 東芝ランプ 配光データシート

名称	反射形蛍光水銀ランプ
形名	HRF200X/T
光束	7000 lm × 1

保守率	良	0.80
	中	0.77
	否	0.73

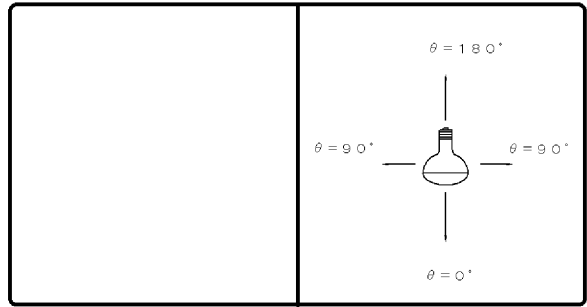

効率	F	%
	F	%
	F	100 %
	器具光束	7000 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	284		
10°	284		
20°	279		
30°	247		
40°	210		
50°	160		
60°	125		
70°	93		
80°	67		
90°	33		
100°	23		
110°	17		
120°	13		
130°	9		
140°	6		
150°	4		
160°	3		
170°	1		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	0	10	0		
室指数	照明率 (×0.01)																			
0.60	56	52	42	40	33	32	54	50	41	39	33	32	39	37	32	31	30	30	25	23
0.80	67	61	52	49	43	41	64	59	51	48	42	40	48	45	40	39	38	38	33	30
1.00	75	68	61	57	51	49	72	65	59	55	50	48	56	53	48	46	46	44	39	37
1.25	82	73	69	63	59	55	79	71	66	61	57	54	62	59	55	52	52	50	45	43
1.50	88	77	75	68	65	61	84	75	72	66	64	60	68	63	60	57	57	55	50	47
2.00	96	83	84	75	75	69	91	81	81	73	73	67	75	70	69	65	65	62	58	54
2.50	101	87	90	80	82	74	96	84	87	78	79	72	80	74	74	70	70	67	62	59
3.00	104	89	95	83	87	78	99	87	91	81	84	76	84	77	79	73	74	70	66	63
4.00	109	92	101	87	94	83	104	90	97	85	91	81	89	82	85	78	79	75	71	68
5.00	112	94	105	90	99	86	106	92	101	88	95	85	93	84	88	81	82	78	74	71
10.00	118	99	114	96	111	94	112	96	109	94	106	92	100	90	97	88	90	85	82	78

