


■ 東芝ランプ 配光データシート

名称	反射形蛍光水銀ランプ
形名	HRF250X/T
光束	9000 lm × 1

保守率	良	0.80
	中	0.77
	否	0.73

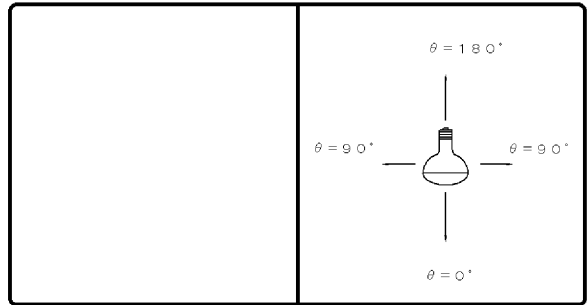

効率	F	%
	F	%
	F	100 %
	器具光束	9000 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		278	
10°		278	
20°		273	
30°		255	
40°		212	
50°		163	
60°		122	
70°		92	
80°		66	
90°		46	
100°		32	
110°		22	
120°		18	
130°		12	
140°		9	
150°		6	
160°		4	
170°		1	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0
室指数		照明率 (×0.01)																		
0.60	58	54	43	41	34	33	56	52	42	40	34	33	40	38	32	31	31	30	25	23
0.80	69	63	54	50	44	42	66	60	52	49	43	41	49	46	41	40	39	38	33	30
1.00	78	70	63	58	53	50	74	67	61	57	52	49	57	54	49	47	46	45	40	37
1.25	85	76	71	65	61	57	81	73	68	63	59	56	64	60	56	53	53	51	46	43
1.50	91	80	77	70	67	63	86	77	74	68	65	61	69	65	62	59	58	56	51	47
2.00	99	86	87	78	78	71	94	83	83	76	75	69	77	72	70	66	66	63	58	55
2.50	104	90	93	82	84	76	99	87	89	80	81	74	82	76	76	71	71	68	63	59
3.00	108	92	98	86	90	80	102	89	94	83	86	78	86	79	80	75	75	71	67	63
4.00	112	95	104	90	97	85	107	93	100	88	93	83	91	83	86	80	80	76	72	68
5.00	115	98	108	93	102	89	109	95	103	91	98	87	94	86	90	83	83	79	75	71
10.00	122	102	118	99	114	97	116	99	112	97	109	94	102	92	99	90	91	86	83	78

