


東芝ランプ 配光データシート

名称	反射形蛍光水銀ランプ
形名	HRF400X/T
光束	15500 lm × 1

保守率	良	0.80
	中	0.77
	否	0.73

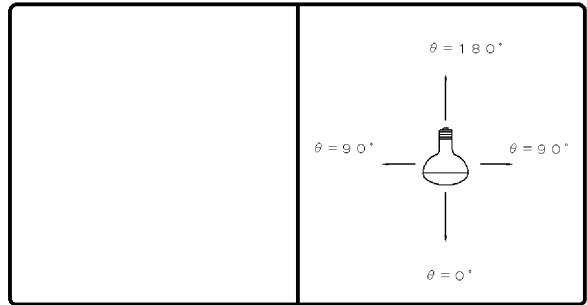

効率	F	%
	F	%
	F	100 %
	器具光束	15500 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		270	
10°		270	
20°		266	
30°		250	
40°		216	
50°		168	
60°		125	
70°		90	
80°		65	
90°		43	
100°		30	
110°		22	
120°		16	
130°		12	
140°		8	
150°		6	
160°		4	
170°		1	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0
室指数	照明率 (×0.01)																			
0.60	58	53	43	41	34	33	55	51	42	40	33	32	39	38	32	31	30	30	25	23
0.80	68	62	53	50	44	42	65	60	52	49	43	41	48	46	41	39	39	38	33	30
1.00	77	69	62	58	52	50	74	67	60	56	51	49	56	53	48	47	46	45	40	37
1.25	84	75	70	64	60	57	81	72	68	63	59	55	63	59	55	53	52	51	46	42
1.50	90	79	77	70	67	62	86	77	74	68	65	61	69	64	61	58	58	56	51	47
2.00	98	85	86	77	77	70	93	83	83	75	75	69	77	71	70	66	65	63	58	54
2.50	103	89	93	82	84	76	98	86	89	80	81	74	82	76	76	71	71	68	63	59
3.00	107	92	97	85	89	80	102	89	93	83	86	78	86	79	80	74	74	71	67	63
4.00	112	95	104	90	97	85	106	92	99	87	93	83	91	83	86	79	80	76	72	68
5.00	115	97	108	92	102	88	109	94	103	90	97	86	94	86	90	83	83	79	75	71
10.00	121	101	117	99	113	96	115	99	111	96	108	94	101	92	99	90	91	86	82	78

