


■ 東芝ランプ 配光データシート

名称	反射形高圧ナトリウムランプ
形名	NHR180・L
光束	15000 lm × 1

保守率	良	0.85
	中	0.83
	否	0.78

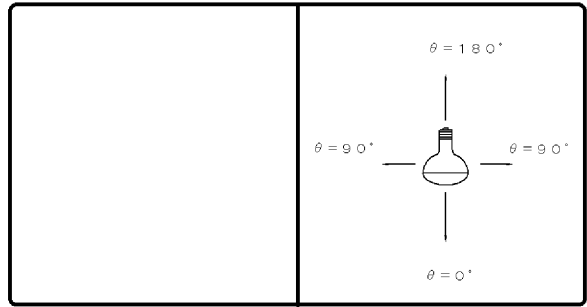

効率	F		%
	F		%
	F	100	%
	器具光束	15000	lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		240	
10°		235	
20°		231	
30°		225	
40°		211	
50°		175	
60°		110	
70°		73	
80°		50	
90°		37	
100°		29	
110°		23	
120°		19	
130°		15	
140°		9	
150°		8	
160°		7	
170°		2	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0		
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0	
室指数		照明率 (×0.01)																			
0.60		53	49	39	37	31	30	51	47	38	36	30	29	36	34	29	28	27	27	23	20
0.80		63	57	49	46	40	39	60	55	47	45	39	38	44	42	37	36	35	35	30	27
1.00		71	64	58	54	49	46	68	62	56	52	47	45	52	49	45	43	42	41	36	34
1.25		78	69	65	60	56	53	74	67	63	58	55	51	58	55	51	49	48	47	42	39
1.50		83	73	71	65	62	58	79	71	69	63	60	57	64	59	57	54	53	52	47	44
2.00		91	79	80	72	72	65	86	76	77	70	69	64	71	66	65	61	61	58	54	50
2.50		95	82	86	76	78	70	91	80	82	74	75	69	76	70	70	66	65	63	58	55
3.00		99	85	90	79	83	74	94	82	86	77	80	72	79	73	74	69	69	66	62	58
4.00		103	88	96	83	90	79	98	85	92	81	86	77	84	77	79	73	73	70	66	62
5.00		106	89	100	86	94	82	100	87	95	83	90	80	87	79	83	76	76	73	69	65
10.00		111	93	108	91	104	89	106	91	103	89	100	87	93	84	91	82	83	78	75	71

