


東芝ランプ 配光データシート

名称	反射形高圧ナトリウムランプ
形名	NHR270・L
光束	25000 lm × 1

保守率	良	0.85
	中	0.83
	否	0.78

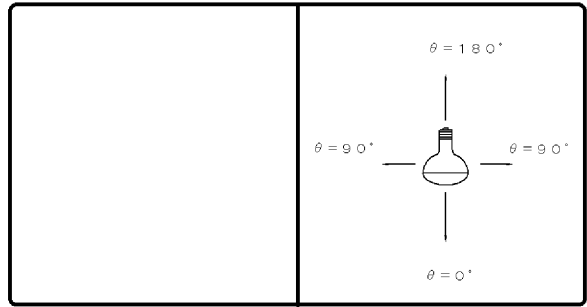

効率	F	%
	F	%
	F	100 %
	器具光束	25000 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	235		
10°	239		
20°	242		
30°	238		
40°	218		
50°	169		
60°	124		
70°	88		
80°	61		
90°	42		
100°	30		
110°	25		
120°	22		
130°	16		
140°	11		
150°	9		
160°	6		
170°	2		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0
室指数	照明率 (×0.01)																			
0.60	56	52	42	39	33	32	54	50	40	38	32	31	38	36	30	30	29	28	24	21
0.80	67	61	52	49	42	41	64	58	50	47	41	40	47	45	39	38	37	36	31	28
1.00	76	68	61	57	51	48	72	65	59	55	50	47	55	52	47	45	44	43	38	35
1.25	83	74	69	63	59	55	79	71	66	61	57	54	61	58	54	52	51	49	44	41
1.50	89	78	75	68	66	61	84	75	72	66	64	59	67	63	60	57	56	54	49	45
2.00	97	84	85	76	76	69	92	81	81	74	73	67	75	70	68	64	64	61	56	53
2.50	102	88	91	80	83	74	96	85	87	78	80	73	80	74	74	69	69	66	61	57
3.00	105	90	96	84	88	78	100	87	92	82	84	76	84	77	78	73	72	69	65	61
4.00	110	93	102	88	95	84	104	91	97	86	91	82	89	81	84	78	78	74	70	65
5.00	113	95	106	91	100	87	107	93	101	89	96	85	92	84	88	81	81	77	73	69
10.00	119	100	115	97	111	95	113	97	110	95	106	92	99	90	97	88	88	84	80	76

