


■ 東芝ランプ 配光データシート

名 称	レフランプミゼット形 (屋内用)
形 名	RF100V38WM
光 束	340 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

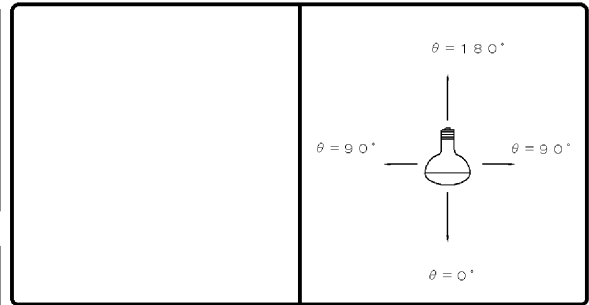

効 率	F		%
	F		%
	F	100	%
	器具 光束	340	lm

最大取付間隔	
A-A	0.9H
B-B	0.9H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		554	
10°		520	
20°		423	
30°		277	
40°		203	
50°		149	
60°		120	
70°		83	
80°		56	
90°		33	
100°		12	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		63	58	49	47	41	40	61	57	48	46	40	39	47	45	40	39	39	38	34	32		
0.80		74	67	60	56	51	48	71	65	58	55	50	48	56	53	48	47	47	46	42	40		
1.00		82	74	68	63	59	56	79	72	67	62	58	55	64	61	56	54	55	53	49	46		
1.25		89	79	76	69	66	62	86	77	74	68	65	62	70	66	63	60	61	59	54	52		
1.50		94	83	82	74	73	67	91	81	80	73	71	67	75	71	68	65	66	64	59	57		
2.00		102	88	91	81	82	75	98	87	88	80	80	74	83	77	77	72	73	70	66	64		
2.50		106	92	97	85	88	80	102	90	93	84	86	79	88	81	82	77	78	75	71	68		
3.00		110	94	101	88	94	83	105	92	98	87	91	82	92	84	86	80	82	78	74	72		
4.00		114	97	107	93	101	88	110	95	103	91	98	87	96	88	92	85	87	83	79	77		
5.00		117	99	111	95	105	92	112	97	107	94	102	90	100	91	96	88	90	86	83	80		
10.00		123	103	120	101	116	99	118	101	115	99	112	97	107	96	104	95	98	92	90	87		

