


東芝ランプ 配光データシート

名称	クールビームライト
形名	CRF100V68WL
光束	630 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

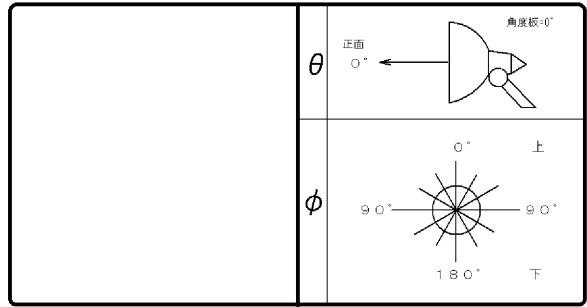

効率	F		%
	F		%
	F	100	%
	器具光束	630	lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	2808		
10°	2282		
20°	760		
30°	242		
40°	112		
50°	44		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0								
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0	0	0	0		
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0	0	0	0		
室指数	照明率 (×0.01)																															
0.60	93	86	84	79	78	75	92	85	83	79	77	75	82	78	77	75	76	75	72	71												
0.80	101	92	92	86	86	83	99	91	91	86	86	82	89	85	84	82	83	81	79	78												
1.00	108	97	99	92	93	88	105	96	97	91	92	88	95	90	90	87	89	86	84	83												
1.25	111	99	103	94	97	91	109	98	101	94	96	91	98	93	94	90	92	89	87	86												
1.50	114	101	106	97	100	93	112	100	104	96	99	93	101	95	96	92	94	91	89	87												
2.00	119	103	112	100	106	97	115	102	109	99	104	96	105	97	101	95	97	94	92	90												
2.50	122	105	115	102	110	99	118	104	112	101	108	98	107	99	104	97	100	96	94	92												
3.00	124	106	118	104	113	101	120	105	115	103	111	100	110	101	106	99	102	98	96	94												
4.00	127	108	123	106	119	104	123	107	119	105	116	103	113	103	110	102	105	100	99	97												
5.00	129	109	126	108	122	106	125	108	122	107	119	106	115	105	113	104	107	102	101	99												
10.00	134	112	132	111	131	111	129	111	128	110	127	110	120	108	119	108	112	106	105	103												

