


東芝ランプ 配光データシート

名称	クールビームライト
形名	CRF100V90WL
光束	860 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

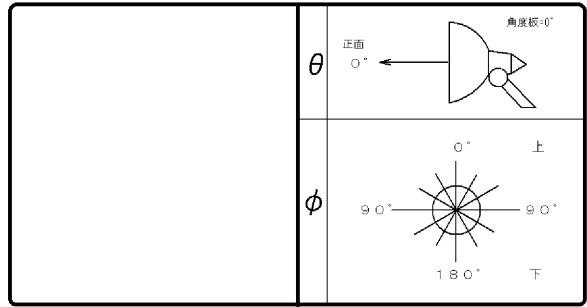

効率	F	%
	F	%
	F	100 %
	器具光束	860 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	2982		
10°	2546		
20°	705		
30°	229		
40°	69		
50°	34		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0
室指数	照明率 (×0.01)																			
0.60	94	87	85	81	80	77	93	86	84	81	79	77	83	80	79	77	78	76	74	73
0.80	102	92	93	87	87	84	100	92	92	87	87	84	90	86	86	83	85	83	81	80
1.00	108	97	99	92	93	89	105	96	98	91	93	88	95	90	91	88	89	87	85	84
1.25	111	99	103	94	97	91	109	98	101	94	96	91	98	93	94	90	92	89	87	86
1.50	114	100	106	96	100	93	111	99	104	96	99	93	101	94	96	92	94	91	89	87
2.00	118	102	111	99	105	96	114	101	108	98	103	95	104	97	100	94	97	93	91	90
2.50	120	104	114	101	109	98	117	103	111	100	107	98	106	98	103	96	99	95	93	92
3.00	123	105	117	103	113	100	119	104	114	102	110	100	109	100	105	98	101	97	95	93
4.00	126	107	121	105	118	103	122	106	118	104	115	103	112	102	109	101	104	99	98	96
5.00	128	108	124	107	121	106	124	107	121	106	118	105	114	104	112	103	107	101	100	98
10.00	132	111	131	110	130	110	128	110	127	109	126	109	119	107	118	107	112	106	105	103

