


■ 東芝ランプ 配光データシート

名 称	レフランプミニ形
形 名	RF110V30WR4 5E17A
光 束	240 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

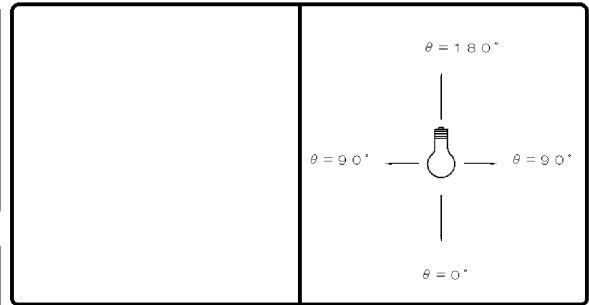

効 率	F		%
	F		%
	F	100	%
	器具 光束	240	lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B
0°		583	
10°		562	
20°		518	
30°		424	
40°		292	
50°		134	
60°		40	
70°		6	
80°		2	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		66	60	54	51	47	46	64	59	53	51	47	46	52	50	46	45	46	45	41	40		
0.80		76	69	65	61	58	55	74	68	64	60	57	55	62	59	56	54	55	54	51	49		
1.00		84	76	74	68	67	63	82	75	73	68	66	63	70	67	65	62	63	62	58	57		
1.25		90	80	81	74	74	69	88	79	79	73	73	69	76	72	71	68	69	67	64	63		
1.50		95	84	86	78	79	74	92	82	84	77	78	73	81	76	76	72	74	71	69	67		
2.00		101	88	93	83	87	80	98	87	91	82	86	79	87	81	83	78	80	77	74	73		
2.50		104	90	98	86	92	83	101	89	95	85	90	82	91	84	87	81	83	80	78	76		
3.00		107	91	101	88	96	86	103	90	98	87	94	85	93	86	90	84	86	82	80	79		
4.00		110	93	105	91	101	89	106	92	102	90	98	88	96	88	93	86	89	85	83	81		
5.00		112	94	108	92	104	90	108	93	104	91	101	90	98	90	96	88	91	87	85	83		
10.00		115	96	113	95	111	94	111	95	109	94	107	93	102	92	101	92	95	90	88	87		

