


■ 東芝ランプ 配光データシート

名 称	レフランプミニ形
形 名	RF110V40WR4 5E17A
光 束	350 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

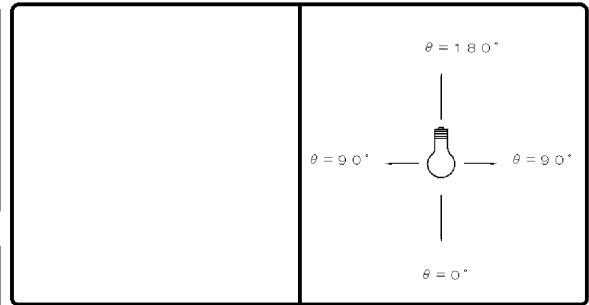

効 率	F		%
	F		%
	F	100	%
	器具 光束	350	lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B
0°		457	
10°		454	
20°		411	
30°		331	
40°		229	
50°		144	
60°		76	
70°		34	
80°		11	
90°		2	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		57	52	45	43	39	38	55	51	45	43	38	37	44	42	38	37	37	37	33	32		
0.80		66	60	55	52	48	46	64	59	54	51	47	46	52	50	47	45	46	45	41	40		
1.00		74	66	63	59	56	53	72	65	62	58	55	53	60	57	54	52	53	52	48	47		
1.25		79	71	70	64	63	59	77	69	68	63	62	58	66	62	60	58	59	57	54	52		
1.50		84	74	75	68	68	63	81	73	73	67	67	63	70	66	65	62	63	61	58	56		
2.00		90	78	82	73	76	69	87	77	80	72	74	69	76	71	72	68	69	67	64	62		
2.50		93	81	87	76	81	73	90	79	84	76	79	72	80	74	76	71	73	70	67	66		
3.00		96	82	90	79	85	76	93	81	87	78	83	75	83	76	79	74	76	72	70	69		
4.00		99	84	94	82	90	79	96	83	91	81	88	78	86	79	83	77	79	76	73	72		
5.00		101	86	97	83	93	81	98	84	94	82	91	80	88	81	86	79	82	77	76	74		
10.00		105	88	103	87	101	86	101	87	99	86	97	85	93	84	91	83	86	81	80	78		

