


東芝ランプ 配光データシート

名称	ミニクリプトン (レフタイプ)
形名	KR100/110V2 2WR45
光束	190 lm × 1

保守率	良	0.88
	中	0.86
	否	0.81

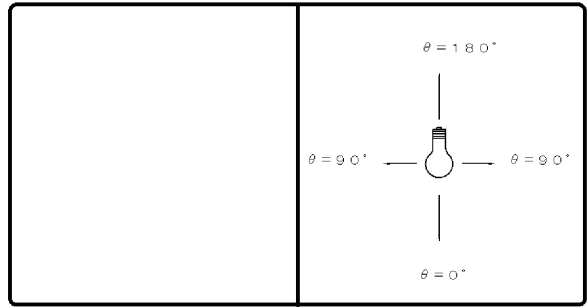

効率	F		%
	F		%
	F	100	%
	器具光束	190	lm

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備考	
----	--

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	579		
10°	563		
20°	505		
30°	395		
40°	289		
50°	200		
60°	132		
70°	74		
80°	26		
90°	11		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	0	30	10	0	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数	照明率 (×0.01)																						
0.60	74	68	59	56	49	48	72	67	58	55	49	47	56	54	48	47	47	46	41	39			
0.80	87	79	71	67	61	59	84	77	70	66	61	58	68	64	59	57	58	57	52	50			
1.00	97	87	82	76	72	68	94	86	81	75	71	68	78	74	69	67	68	66	61	59			
1.25	105	94	91	84	81	76	102	92	89	82	80	75	85	80	78	74	75	73	68	66			
1.50	112	98	98	89	88	82	108	96	96	88	87	81	92	86	84	80	82	79	74	72			
2.00	120	104	109	97	99	91	116	103	106	96	97	90	101	93	94	88	90	87	83	80			
2.50	125	108	115	102	107	96	121	106	112	100	104	95	106	98	100	94	96	92	88	86			
3.00	129	111	120	105	112	100	124	109	116	104	110	99	110	101	105	97	100	96	92	90			
4.00	134	114	126	109	120	105	129	112	122	108	117	104	115	105	111	102	105	100	97	95			
5.00	137	116	130	112	125	109	132	114	126	111	121	108	119	108	115	105	109	103	101	98			
10.00	143	119	139	118	136	116	137	118	134	116	132	114	126	113	123	112	116	110	108	105			

