


■ 東芝ランプ 配光データシート

名 称	ミニクリプトン (レフタイプ)
形 名	KR100/110V4 5WR50
光 束	500 lm × 1

保 守 率	良	0.88
	中	0.86
	否	0.81

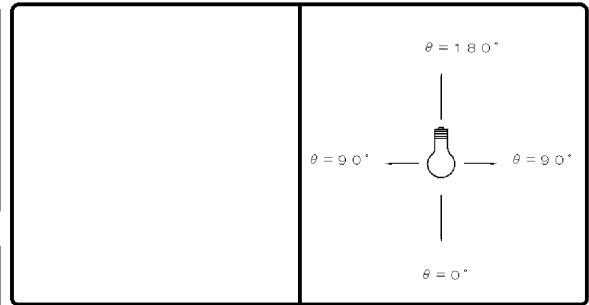

効 率	F		%
	F		%
	F	100	%
	器具 光束	500	lm

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B
0°		560	
10°		534	
20°		462	
30°		344	
40°		244	
50°		162	
60°		90	
70°		42	
80°		14	
90°		4	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		63	58	51	48	43	42	62	57	50	48	43	42	49	47	42	41	42	41	37	35		
0.80		73	67	61	57	53	51	71	65	60	57	53	51	58	55	52	50	51	50	46	44		
1.00		82	73	70	65	62	59	80	72	69	64	61	59	66	63	60	58	59	57	53	52		
1.25		88	78	77	71	69	65	86	77	76	70	68	65	73	68	67	64	65	63	59	58		
1.50		93	82	83	75	75	70	90	81	81	74	74	69	78	73	72	68	70	67	64	62		
2.00		100	87	91	81	84	77	97	86	89	80	82	76	85	79	79	75	77	74	71	69		
2.50		104	90	96	85	90	81	100	88	94	84	88	80	89	82	84	79	81	78	75	73		
3.00		107	92	100	87	94	84	103	90	97	86	92	83	92	85	88	82	84	80	78	76		
4.00		110	94	105	91	100	88	107	93	102	90	97	87	96	88	92	85	88	84	82	80		
5.00		113	95	108	93	104	90	109	94	105	92	101	89	98	90	95	88	91	86	84	82		
10.00		117	98	115	97	112	95	113	97	111	96	109	94	104	94	102	93	96	91	89	87		

