

東芝照明器具配光データシート


名 称	電球埋込ダウンライト
形 名	ID-7365S (W)

名 称	ミニクリプトンランプ
形 名	KR100/110V5 7W・W
光 束	800 lm × 1

前 面	下面開放
反射面	上部：銀色鏡面、下部 バツフル白

良	0.81
中	0.77
否	0.67

F	0 %
F	76 %
F	76 %
器具 光束	605 lm

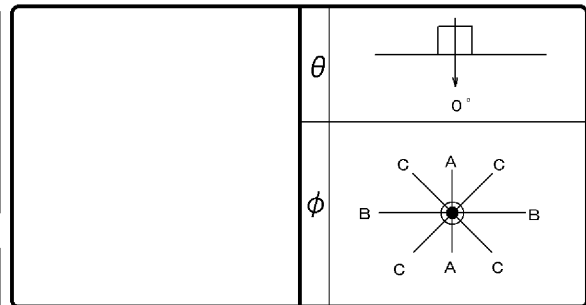

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備 考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	759		
10°	488		
20°	480		
30°	280		
40°	143		
50°	113		
60°	65		
70°	38		
80°	14		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		53	49	44	42	38	37	52	48	43	41	38	37	42	40	37	36	37	36	33	32		
0.80		61	56	52	49	46	44	60	55	51	48	45	44	49	47	44	43	44	43	40	39		
1.00		68	61	59	54	52	50	66	60	58	54	52	49	56	53	51	49	50	48	45	44		
1.25		73	64	64	59	58	54	70	63	63	58	57	54	60	57	56	53	54	53	50	48		
1.50		76	67	68	62	62	58	74	66	67	61	61	57	64	60	59	57	58	56	53	52		
2.00		81	71	74	66	69	63	79	70	73	66	68	62	69	64	65	61	63	61	58	57		
2.50		85	73	78	69	73	66	82	72	76	68	72	65	72	67	69	64	66	63	61	60		
3.00		87	74	81	71	77	68	84	73	79	70	75	68	75	69	72	67	69	66	64	62		
4.00		90	76	85	74	81	72	87	75	83	73	79	71	78	71	75	70	72	68	67	65		
5.00		92	77	88	75	85	74	88	76	85	75	82	73	80	73	78	72	74	70	69	67		
10.00		95	80	93	79	92	78	92	79	90	78	89	77	84	76	83	75	78	74	73	71		

