


■ 東芝ランプ 配光データシート

名称	ネオアークビーム
形名	MR150/VW-MW
光束	7600 lm × 1

保守率	良	0.71
	中	0.69
	否	0.65

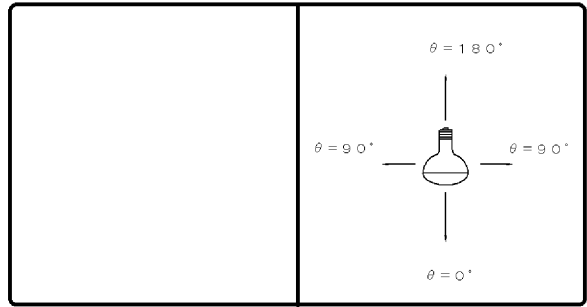

効率	F	%
	F	%
	F	100 %
	器具光束	7600 lm

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	733		
10°	650		
20°	584		
30°	366		
40°	157		
50°	105		
60°	61		
70°	38		
80°	13		
90°	6		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0
室指数	照明率 (×0.01)																			
0.60	64	59	53	50	47	45	62	58	52	50	46	45	51	49	46	44	45	44	41	40
0.80	73	66	62	58	55	53	71	65	61	58	55	53	60	57	54	52	53	52	49	47
1.00	80	72	70	65	63	60	78	71	69	64	62	59	67	63	61	59	60	58	55	53
1.25	86	76	76	70	69	65	83	75	74	69	68	64	72	68	66	64	65	63	60	58
1.50	90	79	81	73	74	69	87	78	79	72	73	68	76	71	71	67	69	66	63	62
2.00	95	83	87	78	81	74	92	82	85	77	80	74	81	76	77	72	74	71	69	67
2.50	99	85	92	81	86	78	95	84	89	80	84	77	85	78	81	76	78	74	72	70
3.00	101	87	95	83	90	80	98	86	92	82	88	79	88	81	84	78	80	77	74	73
4.00	104	89	99	86	95	84	101	88	96	85	93	83	91	83	88	81	84	80	78	76
5.00	106	90	102	88	98	86	103	89	99	87	96	85	93	85	91	83	86	82	80	78
10.00	111	93	108	91	106	90	107	91	105	90	103	89	98	88	97	88	91	86	84	83

