


東芝ランプ 配光データシート

名称	ネオアークビーム
形名	MR150/N-N
光束	7300 lm × 1

保守率	良	0.71
	中	0.69
	否	0.65

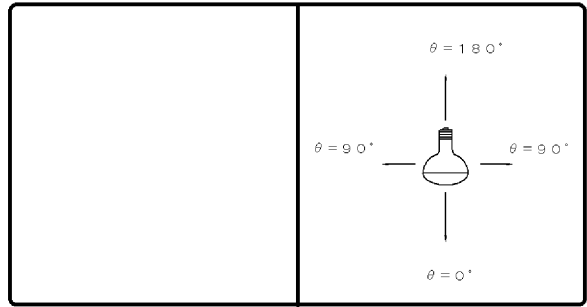

効率	F	%
	F	%
	F	100 %
	器具光束	7300 lm

最大取付間隔	
A-A	0.4 H
B-B	0.4 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	1600		
10°	959		
20°	471		
30°	284		
40°	156		
50°	96		
60°	54		
70°	33		
80°	10		
90°	4		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	30	10	0		
室指数	照明率 (×0.01)																			
0.60	64	59	54	51	48	46	63	58	53	51	48	46	52	50	47	46	46	43	41	
0.80	72	65	62	58	56	54	70	64	61	58	55	53	60	57	55	53	54	52	50	48
1.00	79	71	69	64	63	60	77	70	68	64	62	59	66	63	61	59	60	58	55	54
1.25	83	74	75	68	68	64	81	73	73	68	67	64	71	66	66	63	64	62	59	58
1.50	87	77	79	71	73	67	85	76	77	71	71	67	74	69	69	66	67	65	62	61
2.00	92	80	85	76	79	72	89	79	83	75	78	72	79	74	75	71	72	70	67	66
2.50	95	82	89	79	84	75	92	81	87	78	82	75	82	76	79	74	76	72	70	69
3.00	98	84	92	81	87	78	95	83	90	80	85	77	85	78	81	76	78	75	72	71
4.00	101	86	96	83	92	81	97	85	93	82	90	80	88	81	85	79	81	78	76	74
5.00	103	87	99	85	96	83	99	86	96	84	93	82	90	82	88	81	84	79	78	76
10.00	107	89	105	89	103	88	103	88	101	88	100	87	95	86	94	85	88	83	82	81

