


# ■ 東芝ランプ 配光データシート

名称	ネオアークビーム
形名	MR150/N-MW
光束	7300 lm × 1

保守率	良	0.71
	中	0.69
	否	0.65

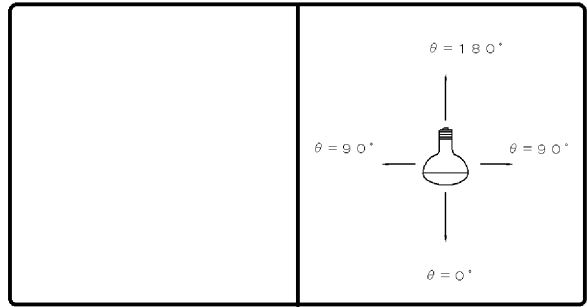

効率	F	%
	F	%
	F	100 %
	器具光束	7300 lm

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

備考

光度 (cd/1000lm)			
$\theta$	A-A	B-B	C-C
0°	716		
10°	635		
20°	570		
30°	361		
40°	153		
50°	103		
60°	59		
70°	37		
80°	13		
90°	6		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	70	50	10	0		
室指数	照明率 (×0.01)																			
0.60	63	58	52	49	46	44	61	57	51	49	45	44	50	48	45	44	44	43	40	39
0.80	71	65	61	57	54	52	70	64	60	57	54	52	58	56	53	51	52	51	47	46
1.00	79	70	68	64	62	59	76	69	67	63	61	58	65	62	60	58	58	57	54	52
1.25	84	74	74	68	68	63	81	73	73	67	67	63	70	66	65	62	63	61	58	57
1.50	88	77	79	72	72	67	85	76	77	71	71	67	74	69	69	66	67	65	62	61
2.00	93	81	86	76	79	73	90	80	83	76	78	72	80	74	75	71	73	70	67	66
2.50	97	83	90	79	84	76	93	82	87	78	82	75	83	77	79	74	76	73	70	69
3.00	99	85	93	81	88	78	96	84	90	81	86	78	86	79	82	76	79	75	73	71
4.00	102	87	97	84	93	82	99	86	94	83	91	81	89	81	86	79	82	78	76	74
5.00	104	88	100	86	96	84	100	87	97	85	94	83	91	83	89	81	84	80	78	76
10.00	108	91	106	89	104	88	104	89	102	88	101	87	96	87	94	86	89	84	83	81

