


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13001K+ZL-100+CL-100

保守率	良	0.73
	中	0.69
	否	0.65


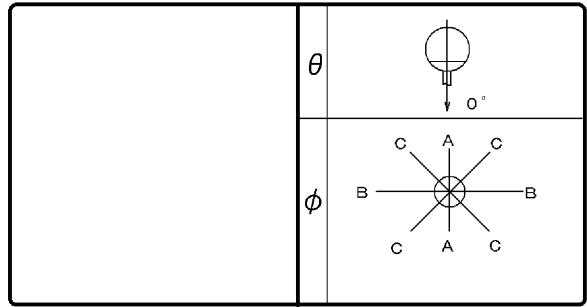


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F $\frac{1}{2}$	11.3 %
	F $\frac{1}{4}$	33.6 %
	F $\frac{1}{8}$	44.9 %
	器具光束	1887 lm

備考 側方遮光

前面	グローブ (透明)
反射面	

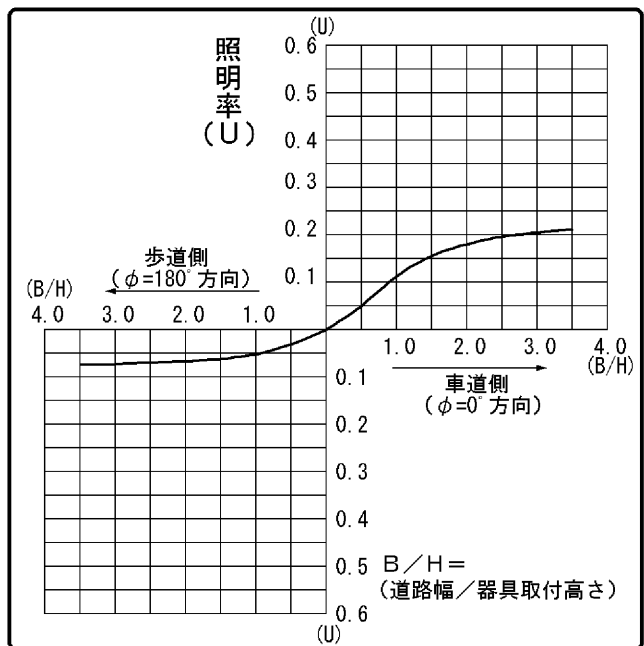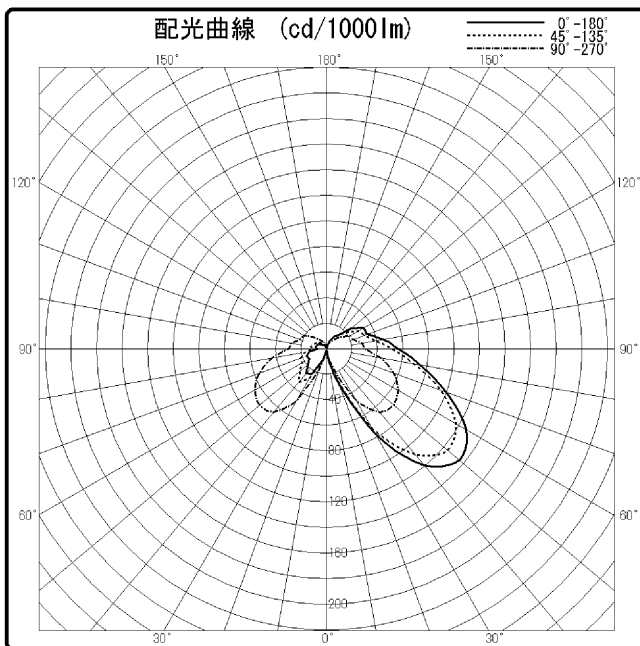

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	4	6	3	3	2
20°	29	28	17	11	10
30°	78	73	47	27	23
40°	119	108	65	34	25
50°	136	124	69	28	19
60°	126	117	65	22	16
70°	100	95	56	22	17
80°	75	70	44	18	14
90°	56	51	30	11	7
100°	45	39	28	13	9
110°	34	32	22	11	8
120°	34	29	21	12	8
130°	25	21	15	9	6
140°	15	14	10	6	4
150°	11	10	7	5	3
160°	6	6	4	4	2
170°	3	4	2	2	1
180°	1	1	1	1	1

