


# 東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13001K+ZL-100+CL-100 (2)

保守率	良	0.73
	中	0.69
	否	0.65


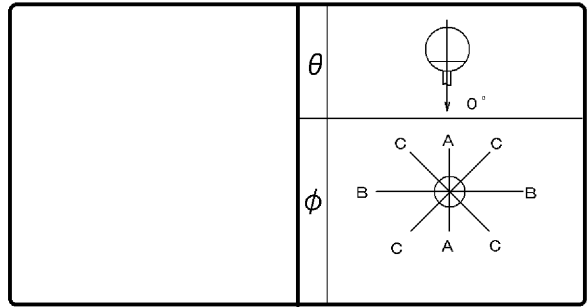


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F $\cup$	10.7 %
	F $\cup$	33.4 %
	F $\circ$	44.1 %
	器具光束	1853 lm

備考 2方向遮光

前面	グローブ (透明)
反射面	

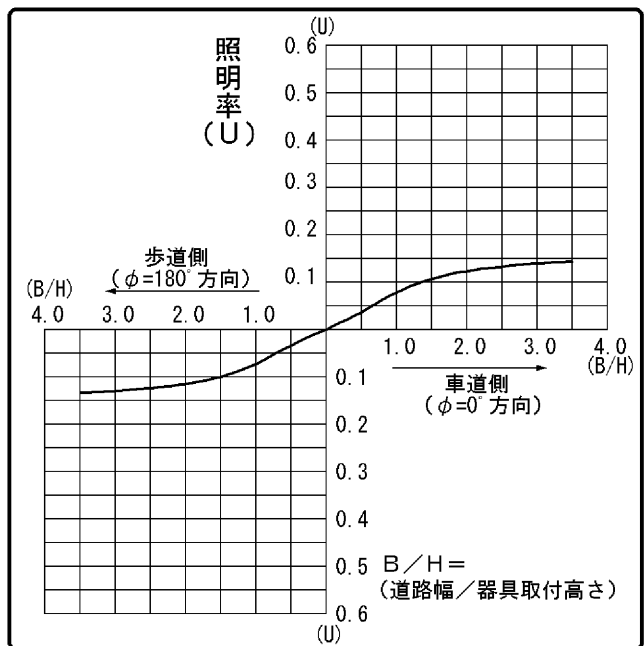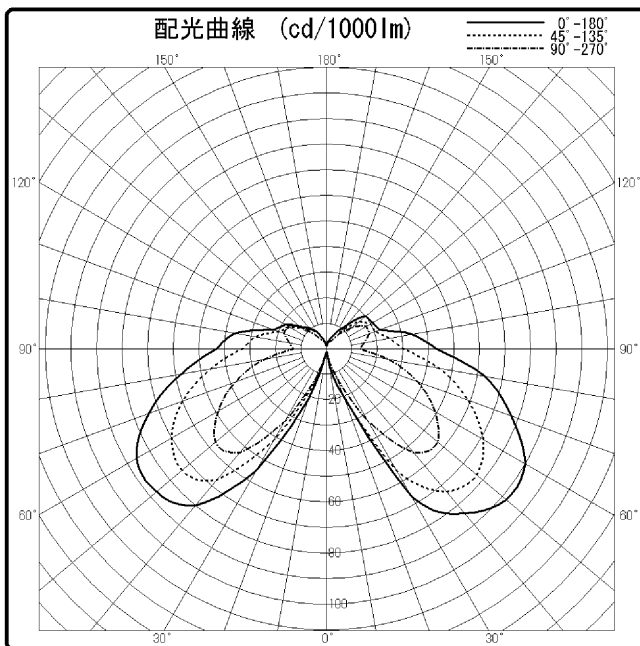

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	6	6	3	3	3
20°	20	20	12	15	21
30°	67	56	33	41	55
40°	84	73	53	67	80
50°	92	77	57	74	87
60°	90	71	49	70	86
70°	77	59	38	60	74
80°	63	45	25	46	58
90°	43	30	13	33	43
100°	34	25	15	28	36
110°	22	20	18	20	22
120°	21	20	18	17	19
130°	20	17	13	13	14
140°	12	9	8	10	11
150°	8	7	4	8	8
160°	4	4	3	4	4
170°	3	3	2	3	2
180°	1	1	1	1	1

