


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13112K+C L-301

保守率	良	0.73
	中	0.69
	否	0.65


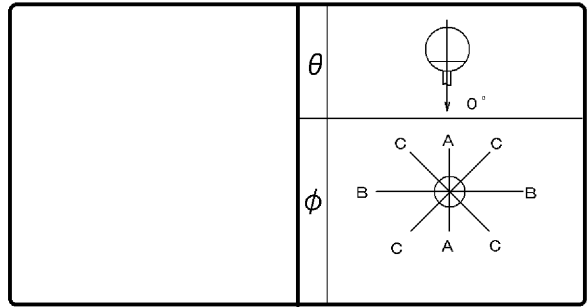


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F	32.5 %
	F	30.1 %
	F	62.6 %
	器具光束	2628 lm

備考

前面	グローブ (透明)
反射面	

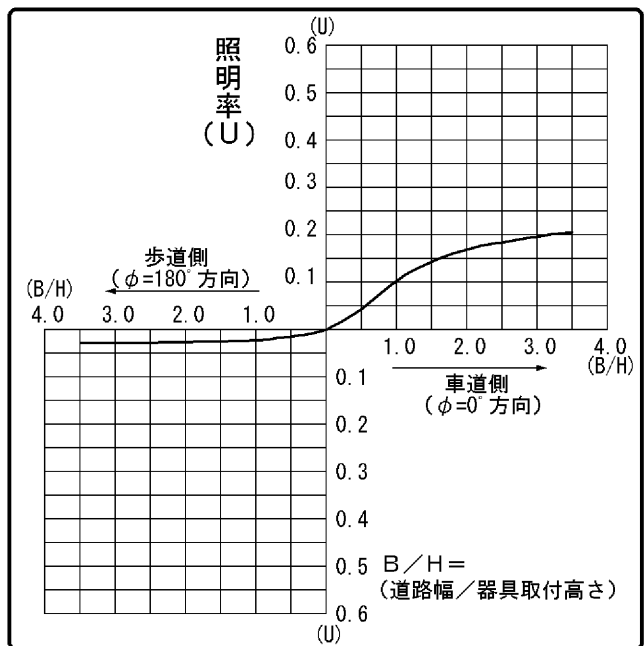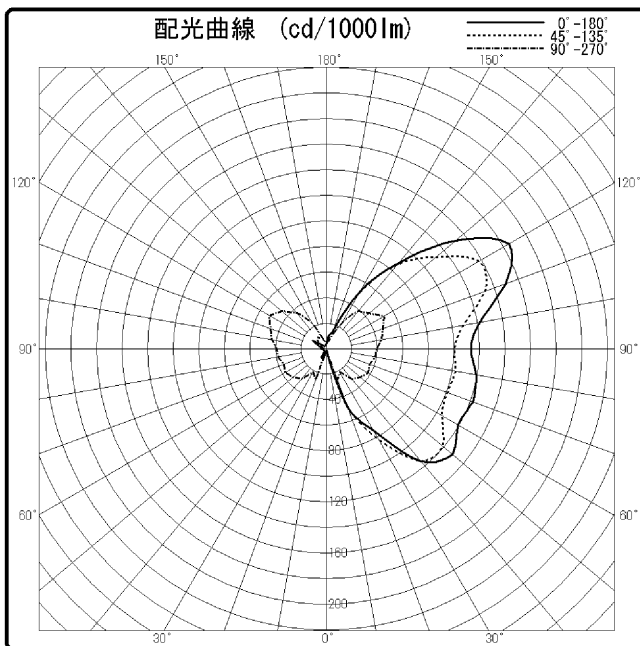

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	4	6	3	3	2
20°	50	49	26	8	9
30°	75	83	21	9	8
40°	115	115	31	4	3
50°	129	119	35	4	2
60°	119	104	38	4	3
70°	122	101	36	4	3
80°	119	103	39	4	3
90°	113	100	39	4	3
100°	122	109	44	6	3
110°	149	132	47	7	6
120°	165	138	52	10	13
130°	132	112	46	9	6
140°	87	86	39	12	3
150°	51	50	22	10	3
160°	14	13	7	7	4
170°	11	9	6	4	3
180°	5	5	5	5	5

