


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13112K+ZL-300+CL-300

保守率	良	0.73
	中	0.69
	否	0.65


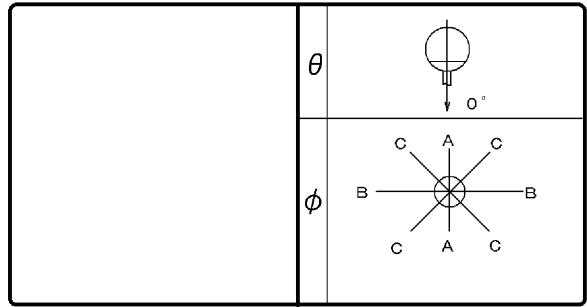


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F $\frac{1}{2}$	11.8 %
	F $\frac{1}{4}$	29.1 %
	F \bigcirc	40.8 %
	器具光束	1715 lm

備考 側方遮光

前面	グローブ (透明)
反射面	

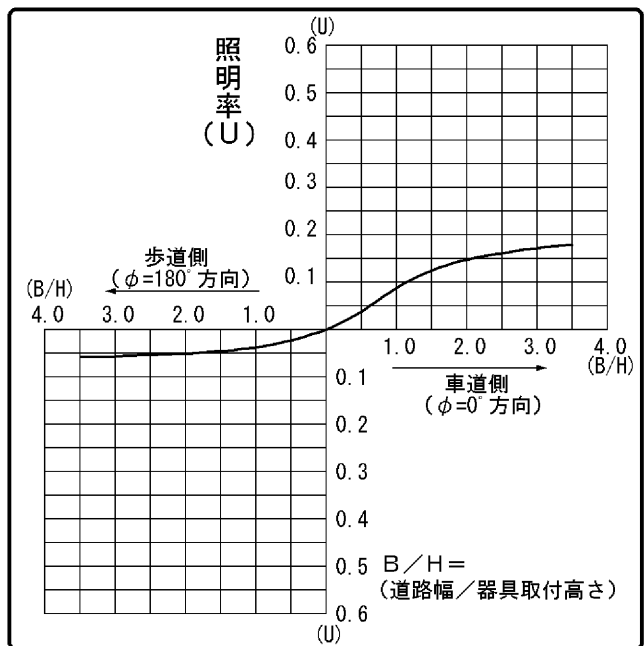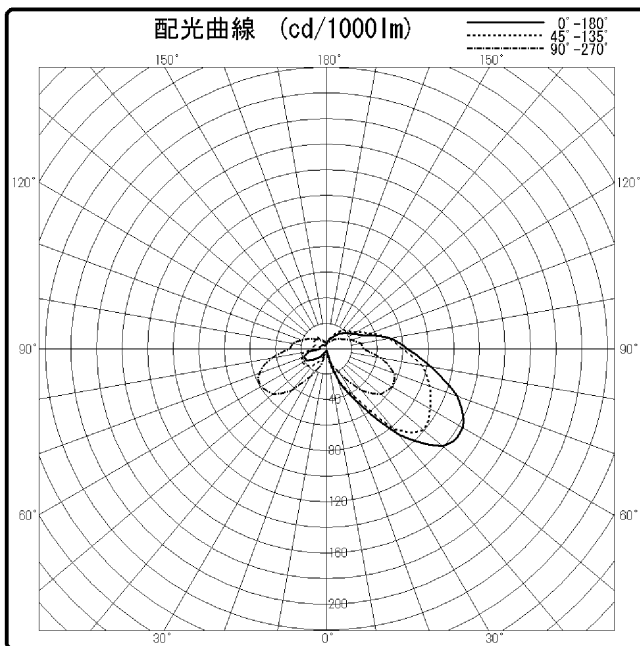

θ \ ϕ	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	3	5	3	2	2
20°	25	24	14	6	3
30°	48	43	25	11	5
40°	88	82	43	18	9
50°	119	99	56	21	14
60°	123	94	60	22	19
70°	109	86	56	21	19
80°	83	76	44	19	14
90°	63	59	29	9	5
100°	50	49	27	11	6
110°	32	36	21	10	6
120°	26	27	16	11	5
130°	20	22	13	12	4
140°	16	19	10	12	4
150°	12	14	7	9	3
160°	9	10	6	7	4
170°	7	7	5	4	3
180°	4	4	4	4	4

