


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13112K+Z L-300

保守率	良	0.73
	中	0.69
	否	0.65


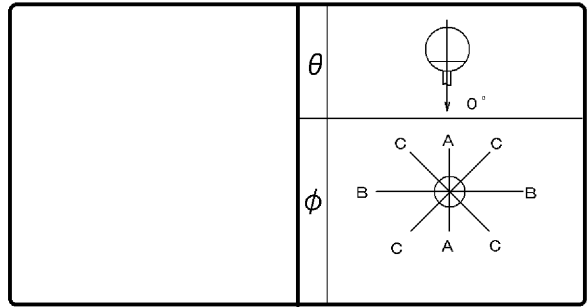


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F \cap	14.8 %
	F \cup	50.8 %
	F \circ	65.7 %
	器具光束	2758 lm

備考

前面	グローブ (透明)
反射面	

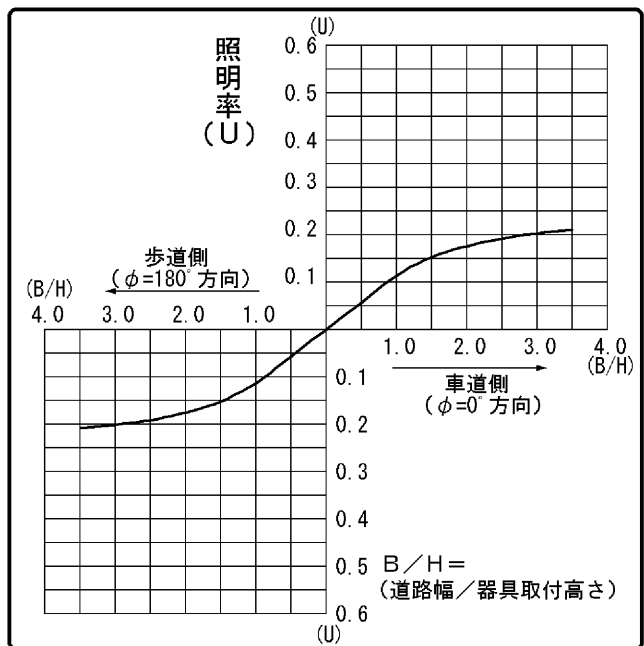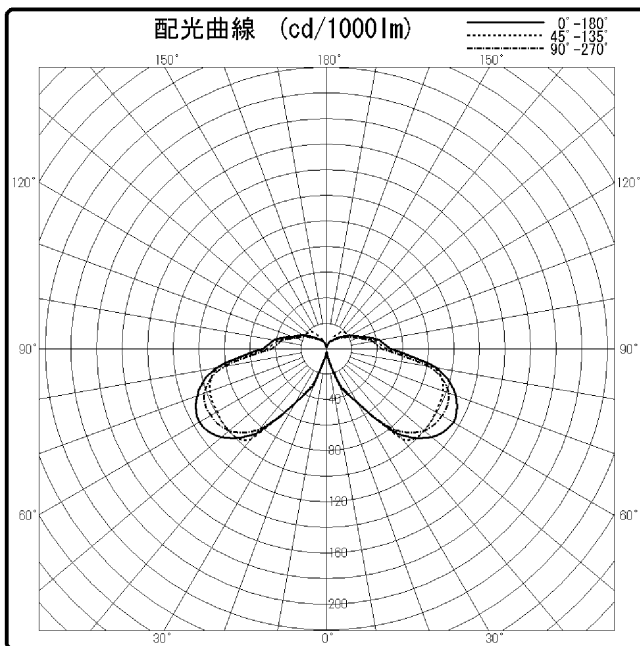

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	2	2	2	2	2
10°	7	7	7	7	7
20°	30	29	28	29	30
30°	50	49	50	49	50
40°	87	93	83	93	87
50°	108	100	100	100	108
60°	115	99	105	99	115
70°	108	97	102	97	108
80°	88	86	82	86	88
90°	50	47	43	47	50
100°	42	39	37	39	42
110°	29	26	26	26	29
120°	22	22	20	22	22
130°	15	20	14	20	15
140°	11	18	10	18	11
150°	7	11	7	11	7
160°	6	6	6	6	6
170°	3	3	3	3	3
180°	1	1	1	1	1

