


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43001K+Z L-300

保守率	良	0.73
	中	0.69
	否	0.65


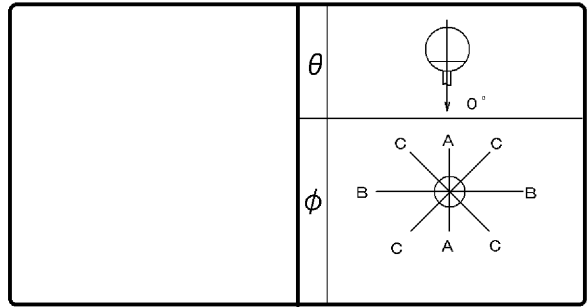


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F \cap	14.5 %
	F \cup	51.0 %
	F \circ	65.5 %
	器具光束	8316 lm

備考

前面	グローブ (透明)
反射面	

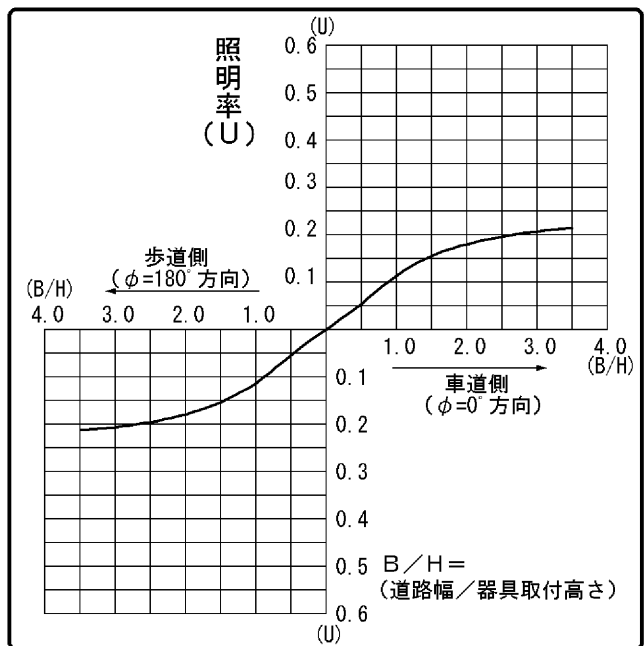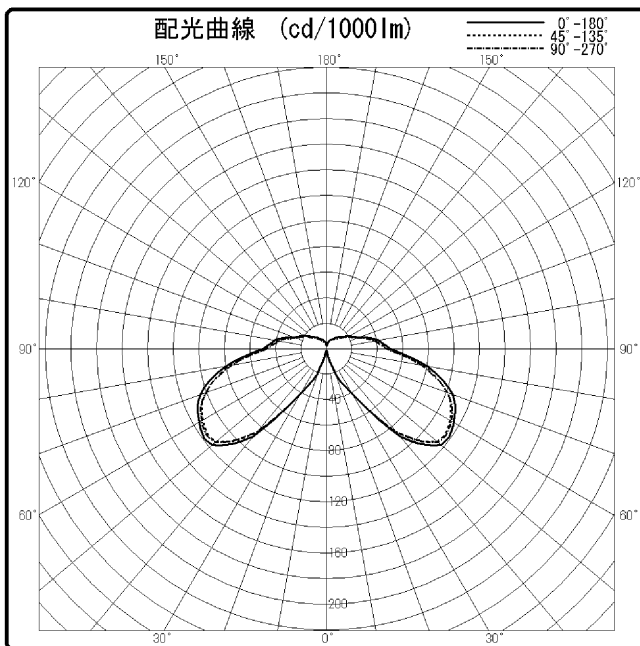

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	2	2	3	2	2
20°	21	21	20	21	21
30°	42	41	41	41	42
40°	90	86	85	86	90
50°	117	113	114	113	117
60°	115	112	113	112	115
70°	105	101	101	101	105
80°	80	77	76	77	80
90°	50	48	47	48	50
100°	41	39	38	39	41
110°	27	27	26	27	27
120°	21	21	20	21	21
130°	15	15	14	15	15
140°	12	12	11	12	12
150°	9	9	8	9	9
160°	7	7	7	7	7
170°	5	4	4	4	5
180°	2	2	2	2	2

