


東芝照明器具配光データシート

名称	街路照明器具
形名	HG-43112K+Z L-300

保守率	良	0.73
	中	0.69
	否	0.65


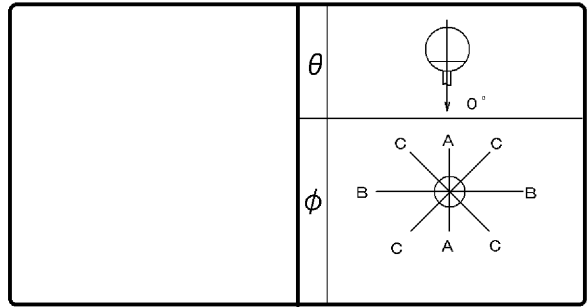


光源	名称	蛍光水銀ランプ
	形名	HF250X
	光束	12700 lm × 1

効率	F	14.6 %
	F	49.9 %
	F	64.5 %
	器具光束	8195 lm

備考

前面	グローブ (透明)
反射面	

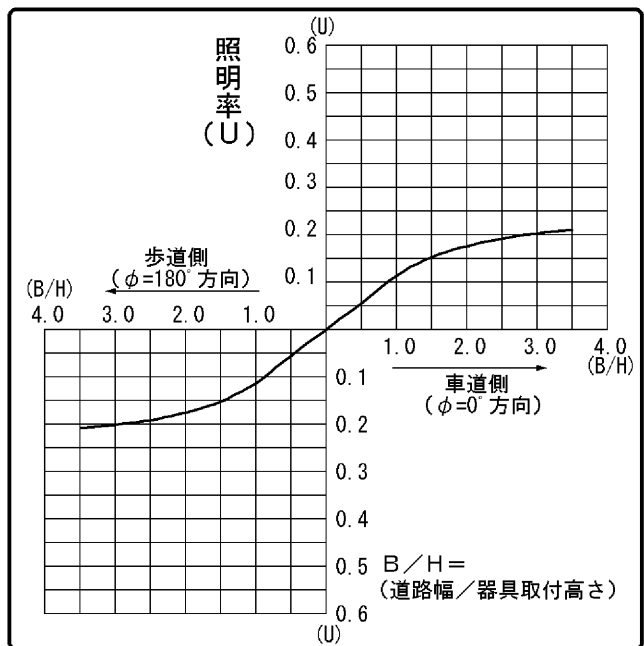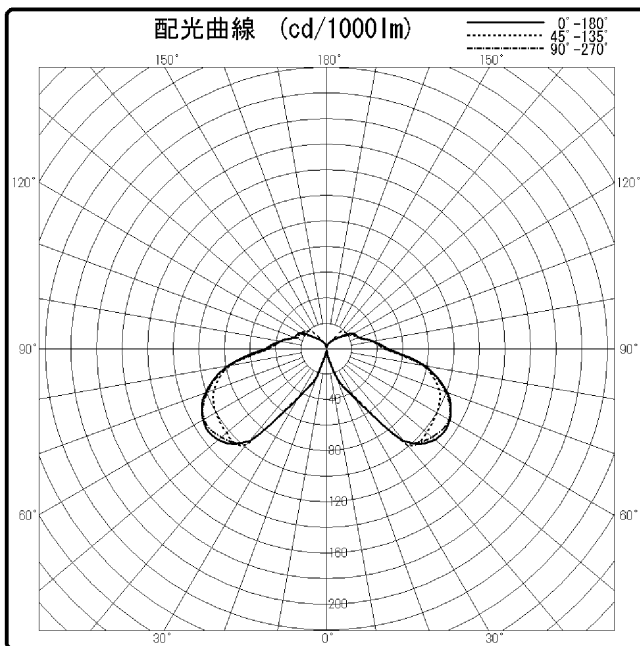

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	1	1	1	1	1
10°	4	3	4	3	4
20°	24	24	23	24	24
30°	46	43	45	43	46
40°	94	98	94	98	94
50°	111	102	108	102	111
60°	112	100	111	100	112
70°	101	94	99	94	101
80°	79	77	77	77	79
90°	48	45	46	45	48
100°	37	37	37	37	37
110°	27	26	25	26	27
120°	25	25	24	25	25
130°	15	20	15	20	15
140°	10	19	10	19	10
150°	7	7	6	7	7
160°	5	5	5	5	5
170°	3	2	2	2	3
180°	1	1	1	1	2

